User Guide Evaluation Kit for TFT 3.5" panel with/without RTP


WWTFTDEMO35L-00# /02#

TFT panel with/without RTP



FPC Cable

a. SSD1963 control board

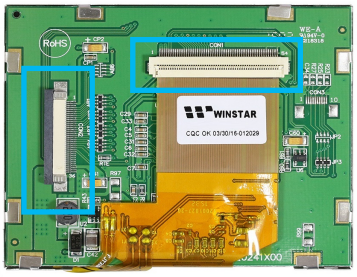


Accessories

c. FFC 36pin



d. Power adapter

b. WWPIC24F-A-00#

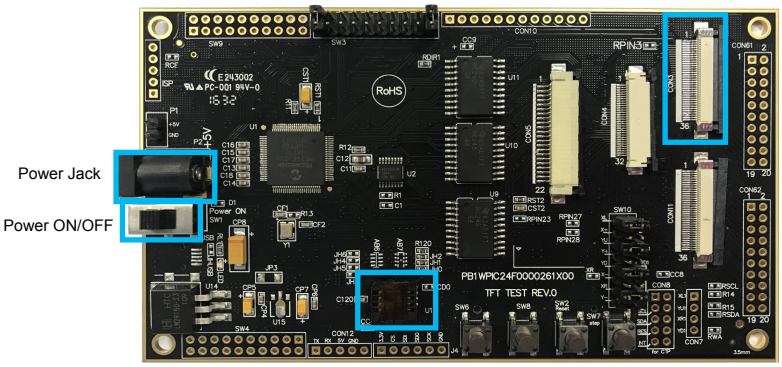

Kit Assembling Guide

1) Connect the TFT display module to the SSD1963 control board (a) via FPC 40pin
2) Connect the SSD1963 control board (a) to the WWPIC24F-A-00# (b) via FFC 36pin (c) between bottom contact ZIF connectors 36pin
3) Insert 5V power adapter (d) to the WWPIC24F-A-00# (b) through power jack connector
4) Power ON through Power ON/OFF switch