
User Guide Evaluation Kit for TFT 3.5" Panel + MCU

WWPIC24F-A-00#35Q

TFT Panel + MCU No touch




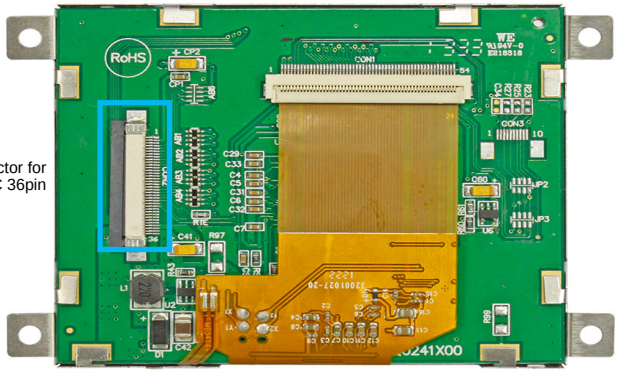

ZIF Connector for FFC 36pin

TFT Panel + MCU + Resistive touch panel




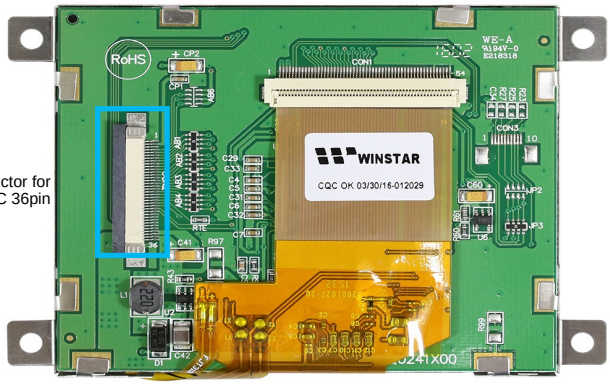

ZIF Connector for FFC 36pin

TFT Panel + MCU + Capacitive touch panel



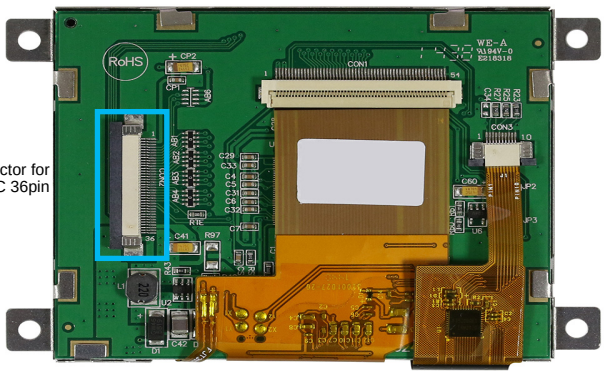


ZIF Connector for FFC 36pin

User Guide Evaluation Kit for TFT 3.5" Panel + MCU

WWPIC24F-A-00#35Q

Accessories

b. FFC 36pin



c. Power adapter




a. WWPIC24F-A-00#

ZIF Connector for FFC 36pin

Power Jack

Power ON/OFF

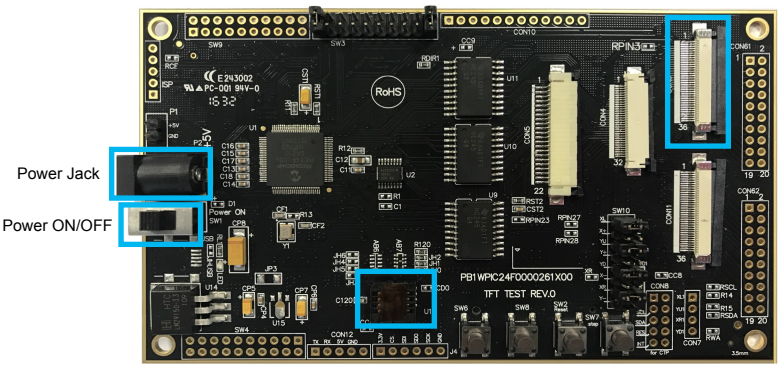

Flash IC for images upload

Kit Assembling Guide

1) Connect the SSD1963 control board to the WWPIC24F-A-00# (a) via FFC 36pin (b) between bottom contact ZIF connectors 36pin
2) Insert 5V power adapter (c) to the WWPIC24F-A-00# (a) through power jack connector
3) Power ON through Power ON/OFF switch