
Pin Header

pitch 2.54mm (0.1") | Dual row | Dip

GPHA213 Series

Specifications

Current Rating :	3.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	600V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40˚C to +105˚C

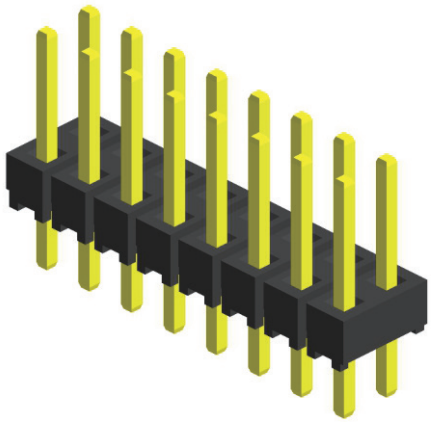



Materials


Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.

Mating with

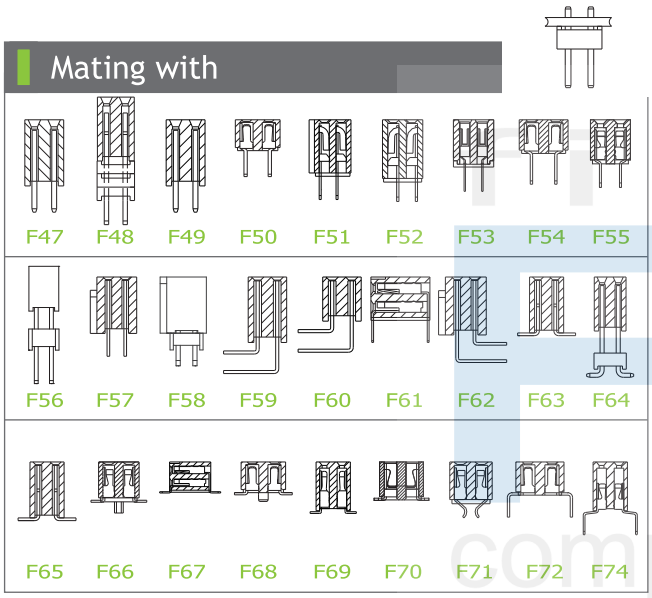

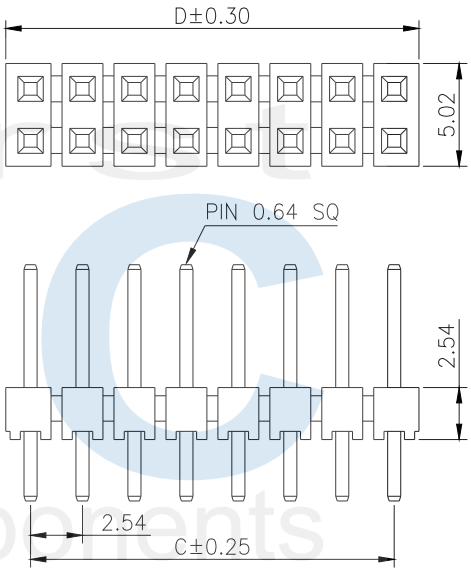



＊For Coded Dimension Not Inside The Table, Please Refer To"Ordering Information"

No. of Pins/Row	Dimension Information C	D
02	2.54	4.96
03	5.08	7.50
04	7.62	10.04
05	10.16	12.58
06	12.70	15.12
07	15.24	17.66
08	17.78	20.20
09	20.32	22.74
10	22.86	25.28

No. of Pins/Row	Dimension Information C	D
11	25.40	27.82
12	27.94	30.36
13	30.48	32.90
14	33.02	35.44
15	35.56	37.98
16	38.10	40.52
17	40.64	43.06
18	43.18	45.60
19	45.72	48.14
20	48.26	50.68

No. of Pins/Row	Dimension Information C	D
21	50.80	53.22
22	53.34	55.76
23	55.88	58.30
24	58.42	60.84
25	60.96	63.38
26	63.50	65.92
27	66.04	68.46
28	68.58	71.00
29	71.12	73.54
30	73.66	76.08

Ordering Information

GPHA2 [XX] - [XX] [XX] [X] [XXX] C1BA

Height Option (H)
- 13

No. of Pins per Row
- 02
- ≀
- 30

Standard Plating
- 02 : Gold Flash

Selective Plating
- 01 : Tin
- 05 : Gold Flash / Tin

Pin Length (A / B)
- A
- 001 : A=6.00 / B=3.00
- 005 : A=4.95 / B=3.45
- For special length requirement Please contact our sales personnel

Stardand Packaging : Box

Due to technical progress, all designs, specifications and components are subject to change without notice.