Next Vision Display
Brighten The Future

NEXT VISION DISPLAY

SPECIFICATION

CUSTOMER : _____

MODULE NO.: NT019-C002GL-C

Version	V2
Engineer	
Date	02-27-2023

Next Vision Display
Brighten The Future

Customer:
Approved by

NEXT VISION DISPLAY CO., LTD.

地址: 中國上海小木橋路600號
ADD: 600 XIAO MU QIAO ROAD, SHANGHAI, CHINA

WEB: www.nextvisiondisplay.com

TECHNICAL: technical@nextvisiondisplay.com
MARKETING: marketing@nextvisiondisplay.com
SALES: sales@nextvisiondisplay.com

Represented by:

first FC components
FIRST Components s.r.l.
www.first-components.com
sales@first-components.com
+39 0332 1888005

Table of Contents

1 General Description....3
2 Module Parameter.... 3
3 Mechanical Drawings....4
4 Module Interface.... 6
5 Application Circuit.... 7
6 Absolute Maximum Ratings....10
7 Electrical Specification....10
8 AC Characteristics....10
9 Command Table....10
10 Recommended Setting and Initialization Flow for Reference....10
11 Optical Specifications....11
11.1 Optical Specifications....11
11.2 Definition of Response Time....12
11.3 Definition of Contrast Ratio....12
11.4 Definition of Viewing Angles....13
11.5 Definition of Color Appearance....13
11.6 Definition of Surface Luminance, Uniformity and Transmittance....13
12 Quality Assurance....14
12.1 Purpose....14
12.2 Agreement Items....14
12.3 Standard of the Product Visual Inspection....14
12.4 Inspection Specification....15
12.5 Classification of Defects....19
12.6 Identification/marking criteria....19
12.7 Packing....19
13 Reliability Specification....19
14 Precautions and Warranty....20
14.1 Safety....20
14.2 Handling....20
14.3 Operation....20
14.4 Static Electricity....20
14.5 Limited Warranty....21
15 Packaging....21
16 Prior Consult Matter....21

Next Vision Display
Brighten The Future

1 General Description

This display module is a transmissive type color active matrix TFT(Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This module is composed of a TFT LCD module, a driver circuit, and a back-light unit.The resolution of a 1.9" contains 170(RGB)X320 dots and can display up to 262k colors.


2 Module Parameter

Features	Details	Unit
Display Size(Diagonal)	1.9	inch
LCD type	α-Si TFT	-
Display Mode	IPS / Transmissive / Normally Black	-
Resolution	170RGB x 320	-
View Direction	All	Best image
Module Outline	25.8(H) ×49.72(V)×1.43(T) (Note 1)	mm
TP Outline	N/A	mm
TP Viewing Area	N/A	mm
TP Active Area	N/A	mm
Active Area	22.7 (H)×42.72(V)	mm
Viewing Area	N/A	mm
Display Colors	262K	-
Interface	4-SPI/8bit 8080	-
Driver IC	ST7789V2	-
Operating Temperature	-20～70	ºC
Storage Temperature	-30～80	ºC
Weight	TBD	g

Note 1: Excluding hooks, posts , FPC/FPC tail etc.

Next Vision Display
Bring The Future

3 Mechanical Drawings

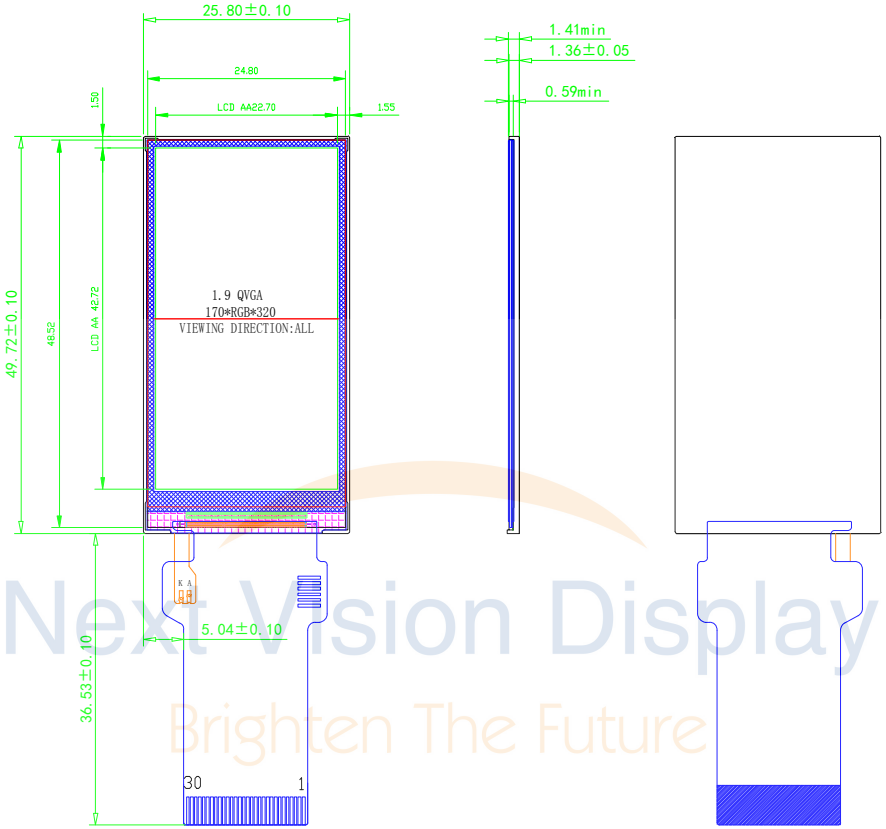

NO	SYMBOL
1	GND
2	VCI
3	IM2
4	IM1
5	RES
6	CS
7	DC
8	WR
9	RD
10	SDA
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	SDO
20	LEDA
21	LEDK
22	LEDK
23	LEDK
24	LEDK
25	GND
26	TP-REST
27	TP-SCL
28	TP-SDA
29	TP-INT
30	GND

(SPI_CS


NOTES:


1. VIEWING DIRECTION : FREE
2. POLARIZER MODE : TRANSMISSIVE
3. OPERATING TEMP : -20° C~+70° C
4. STORAGE TEMP 12 O'CLOCK : -30° C~+80° C
5. DRIVER IC : ST7789V2+
6. CONNECTOR : COG+FPC
7. GENERAL TOLERANCE : ±0.2
8. LCD V,A为建议客户机壳开窗尺寸


REV	DESCRIPTION	DATE
2		
1		

Next Vision Display
Brighten The Future

SCALE:1/1	UNIT:mm	PAGE:1/1		Approve	Check	Drawn
Part No:	NT019-C002GL-C	REV: V1				Y1F
Customer No:						

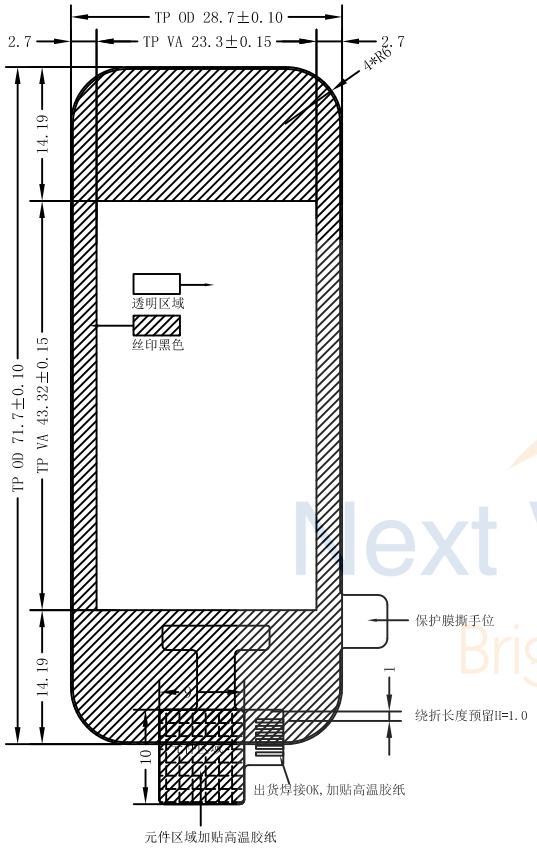

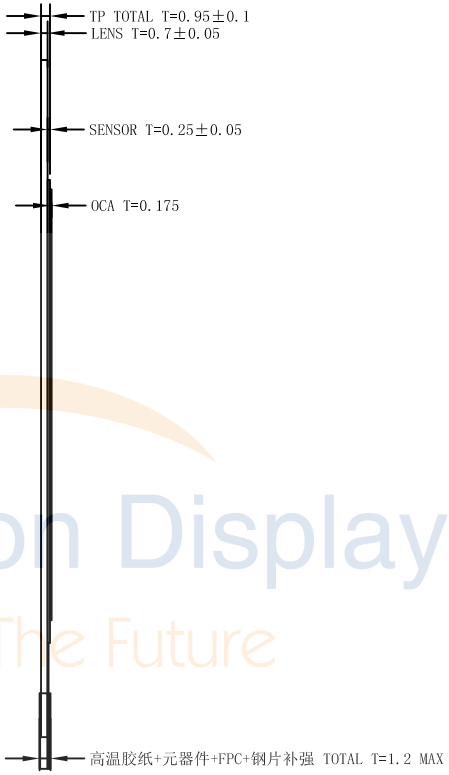

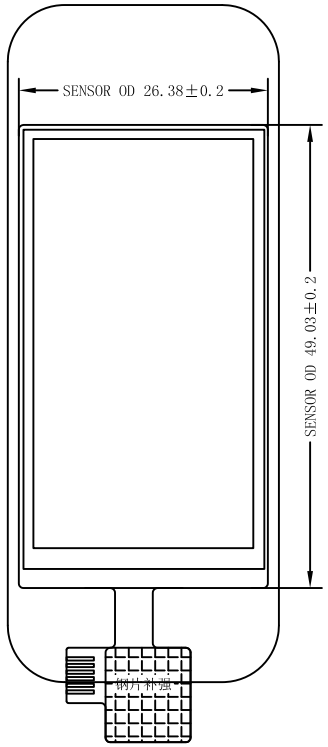

TP	
PIN	Define
1	TP_VDD_3V3
2	TP_GND
3	TP_RST
4	TP_SCL
5	TP_SDA
6	TP_INT

技术要求:

1、IC方案：IC-FT6336U G+F

2、产品透过率为86%以止

3、表面处理:正表面硬度6H以上;

4、产品符合RoHS标准;

VER.	REVISED RECORD	DRAWED BY	DATE
A1	NEW ISSUE	Pretty	23-2-27
A2			
A3			
A4			

CTP SPECIFICATION		
1. VDD	V	APPROVED BY
2. OPERATION TEMP.	-20 ° C TO 70 ° C	CHECKED BY
3. STORAGE TEMP.	-30 ° C TO 80 ° C	DRAWED BY
4. SOLDERABILITY	PASS ROHS	

Next Vision Display
Brighten The Future

		CUSTOM NO.		UNMARKED TOLERANCE	±0.2
		DESIGN NO.& (VERSION)	V2	UNIT	mm
Pretty	23-2-27	MODEL NO.	NT019-C002GL-C	SHEET	1 OF 1

由 Autodesk 教育版产品制作


4 Module Interface

NO	SYMBOL	FUNCTION
1	GND	Power Ground
2	VDD	Power Supply for Analog, VDD=2.4V~3.3V.
3	IM2	when IM1=0, IM2=0，8080-8bit;when IM1=1, IM2=1，4-line SPI serial I/F.
4	IM1	
5	RESET	This signal will reset the device and it must be applied to properly initialize the chip. Signal is active low.
6	CS	Chip selection pin; Low enable, High disable.
7	D/C（SPI-SCL）	When connecting to an 8080-series microprocessor, this pin receives the data/command selection pin .This pin is used to be serial interface clock in 4-line serial interface.
8	WR（SPI-RS）	When connecting to an 8080-series microprocessor, this pin receives the write signal.Display data/command selection pin in 4-line serial interface.
9	RD	When connecting to an 8080-series microprocessor, this pin receives the Read signal. Read operation is initiated when this pin is pulled LOW and the chip is selected.When serial interface is selected, this pin must be connected to Ground.
10	SDA	SPI interface input/output pin. The data is latched on the rising edge of the SCL signal.
11-18	D0-D7	MCU parallel interface data bus.
19	NC	No Connect
20	LEDA	LED Anode
21	LEDK1	LED Cathode
22	LEDK2	LED Cathode
23	LEDK3	LED Cathode
24	LEDK4	LED Cathode
25	GND	Power Ground
26	TP_RST	System reset of Touch Panel；If no used，let this pin open.
27	TP_SCL	I²C clock signal of Touch Panel；If no used，let this pin open.
28	TP_SDA	I²C data signal of Touch Panel；If no used，let this pin open.
29	TP_INT	Interrupt signal to main processor of Touch Panel；If no used，let this pin open.
30	GND	Power Ground


Next Vision Display
Brighten The Future

5 Application Circuit

8bit 8080

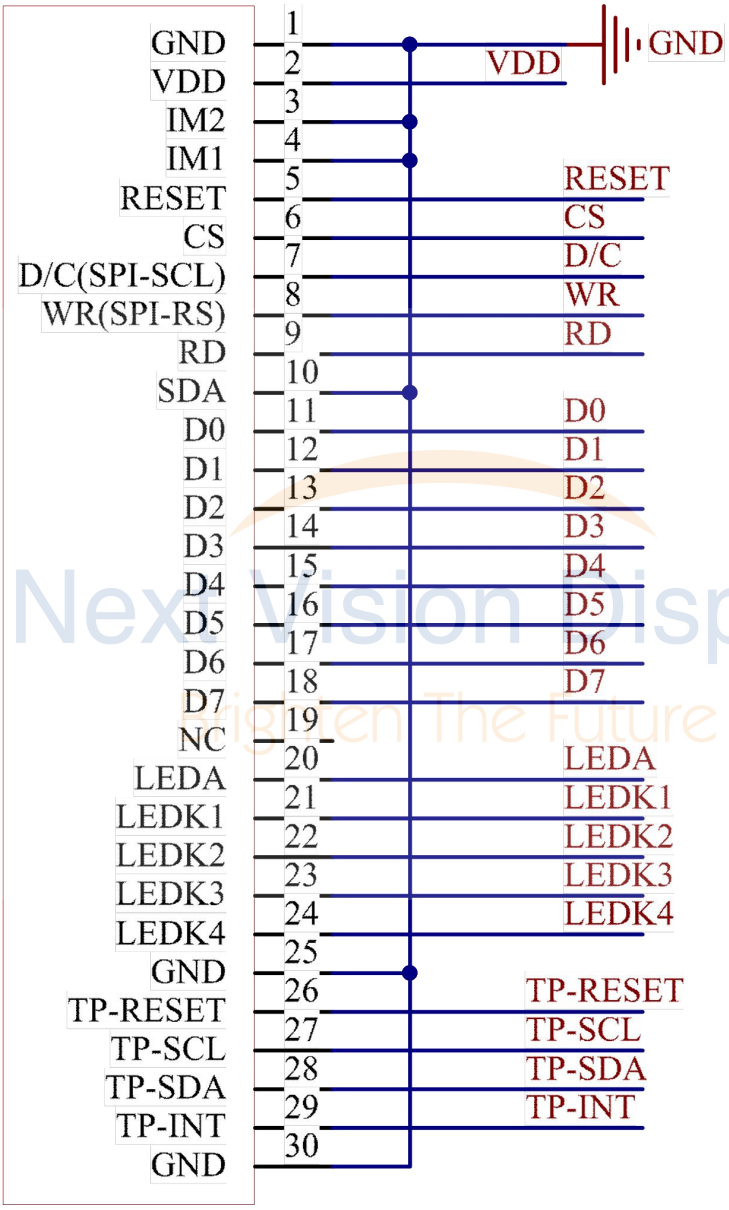


Next Vision Display
Brighten The Future

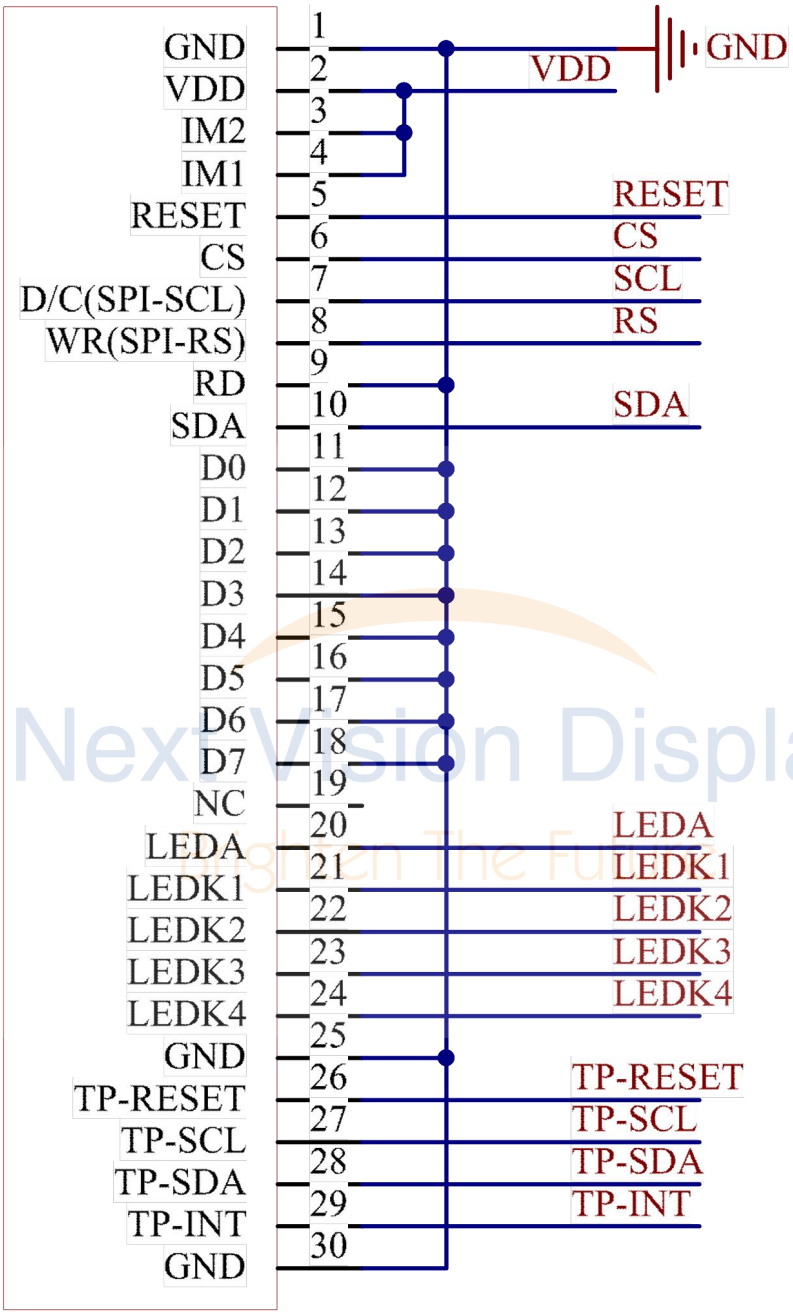


Next Vision Display
Brighten The Future

Backlight recommended circuit

Motherboard driver backlight is need constant current circuit, if the rated voltage screen after light brightness difference.Current and power consumption of the machine are inconsistent, so recommend a backlight driving circuit is best rated current.It is recommended to use IC (AW9364). The reference circuit is as follows：

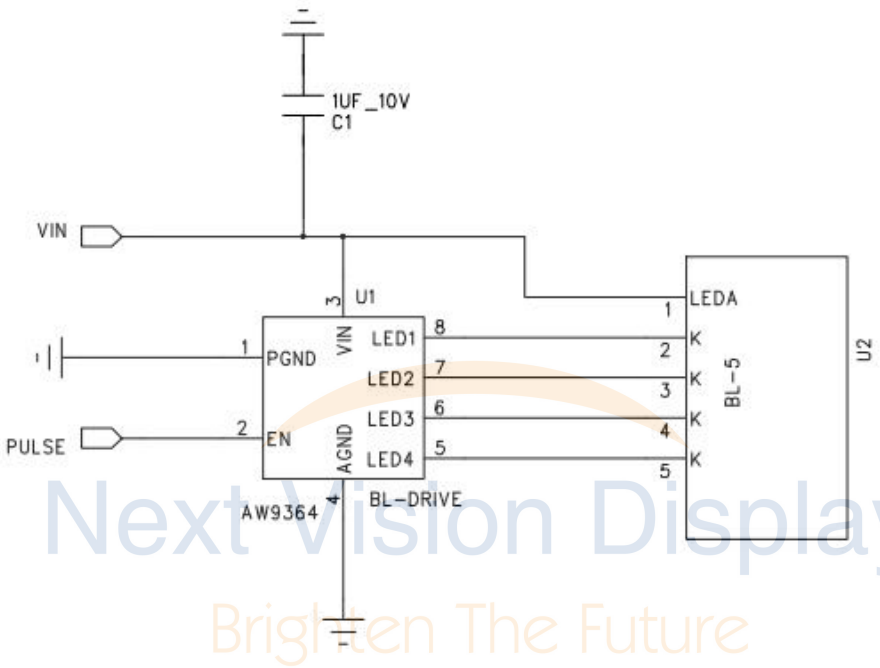



Note: constant current circuit for every LED,and though LED lamp current is less than 20mA.Recommand between 15mA and 20 mA for every LED.

Next Vision Display
Brighten The Future

6 Absolute Maximum Ratings

VSS=0V, Ta=25ºC

Item		Symbol	Min.	Max.	Unit
Supply Voltage	Power supply	VDD	-0.3	+4.6	V
	Analog	-	-	-	V
	IO	IOVDD	-0.3	+4.6	V
Input Voltage		Vi	-0.3	IOVDD+0.3	V
Storage temperature		T_{stg}	-30	+80	ºC
Operating temperature		T_{op}	-20	+70	ºC
Storage humidity		H_{stg}	10	Note 1	%RH
Operating humidity		H_{op}	10	Note 1	%RH

Note 1: 90%RH max, If Ta is below 50ºC; 60%RH max, If Ta is over 60ºC.

7 Electrical Specification

DC Characteristics

Item		Symbol	Min.	Typ.	Max.	Unit
Supply Voltage	Power supply	VDD	2.4	2.8	3.3	V
	Analog	VCI	2.4	2.8	3.3	V
	IO	IOVDD	1.65	1.8/2.8	3.3	V
Logic Low input voltage		V_{IL}	-0.3IOVDD	-	0.3IOVDD	V
Logic High input voltage		V_{IH}	0.7IOVDD	-	IOVDD	V
Logic Low output voltage		V_{OL}	-	-	0.2IOVDD	V
Logic High output voltage		V_{OH}	0.8IOVDD	-	-	V
Current Consumption	Normal display	Ivdd	-	50	-	mA
	Standby mode	Ivdd	-	20	-	uA
Frame Frequency		f_{FR}	-	60	-	Hz

Next Vision Display
Brighten Your Life

8 AC Characteristics

Reset timing and interface timing:

Please refer to IC datasheet.

9 Command Table

Please refer to IC datasheet.

10 Recommended Setting and Initialization Flow for Reference

Please refer to attached file.

11 Optical Specifications

11.1 Optical Specifications


Ta=25ºC, VDD=2.8V, TN LC+ Polarizer

	Item		Symbol	Condition	Specification			Unit
					Min.	Typ.	Max.	
Backlight On (Transmissive Mode)	Luminance on surface(I_f =20mA)		*Lv*	Normally viewing angle $\theta_X = \theta_Y$ =0º	300	330	-	cd/m²
	Contrast ratio		*CR*		-	600	-	-
	Response time		*TR*		-	10	20	ms
			TF	-	-	20	30	
	Chromaticity Transmissive	Red	*XR*	-	0.614	0.644	0.674	-
			YR		0.290	0.320	0.350	-
		Green	*XG*		0.270	0.300	0.330	-
			YG		0.540	0.570	0.600	-
		Blue	*XB*		0.104	0.134	0.164	-
			YB		0.097	0.127	0.157	-
		White	*XW*		0.267	0.297	0.327	-
			YW		0.302	0.332	0.362	-
	Viewing Angle	Horizontal	θX+	Center CR≥10	-	80	-	Deg.
			θX-		-	80	-	
		Vertical	θY+		-	80	-	
			θY-		-	80	-	
	NTSC Ratio(Gamut)		-	-	-	60	-	%

Next Vision Display
Brighten The Future

11.2 Definition of Response Time


11.2.1 Normally Black Type (Negative)

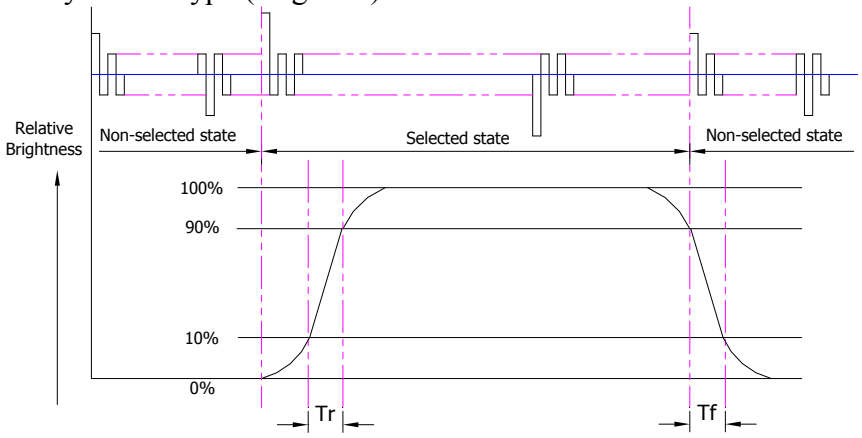

Tr is the time it takes to change form non-selected state with relative luminance 10% to selected state with relative luminance 90%;

Tf is the time it takes to change from selected state with relative luminance 90% to non-selected state with relative luminance 10%.

11.2.2 Normally White Type (Positive)

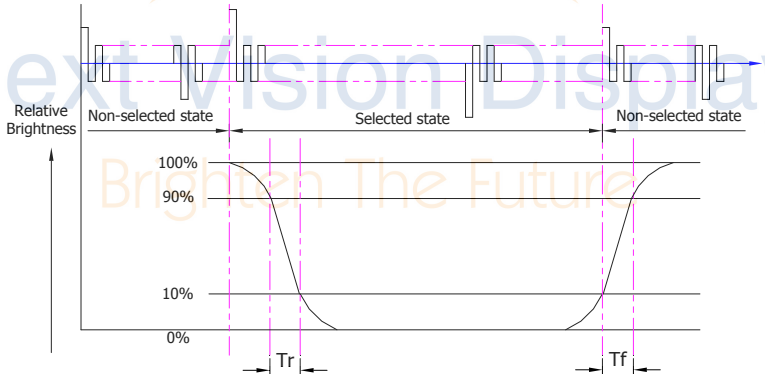

Tr is the time it takes to change form non-selected state with relative luminance 90% to selected state with relative luminance 10%;

Tf is the time it takes to change from selected state with relative luminance 10% to non-selected state with relative luminance 90%;


11.3 Definition of Contrast Ratio

Contrast is measured perpendicular to display surface in reflective and transmissive mode. The measurement condition is:

Measuring Equipment	BM-7 or EQUI
Measuring Point Diameter	3mm//1mm
Measuring Point Location	Active Area centre point
Test pattern	A: All Pixels white
	B: All Pixel black
Contrast setting	Maximum

Definitions: CR (Contrast) = Luminance of White Pixel / Luminance of Black Pixel

11.4 Definition of Viewing Angles

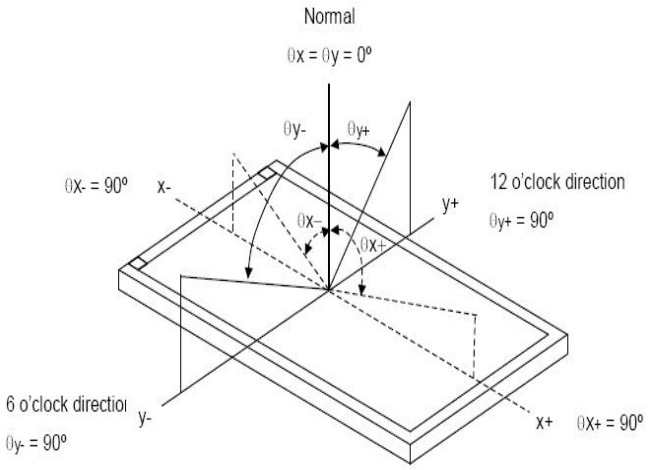


Measuring machine: LCD-5100 or EQUI

11.5 Definition of Color Appearance

R,G,B and W are defined by (x, y) on the IE chromaticity diagram

NTSC=area of RGB triangle/area of NTSC triangleX100%

Measuring picture: Red, Green, Blue and White (Measuring machine: BM-7)

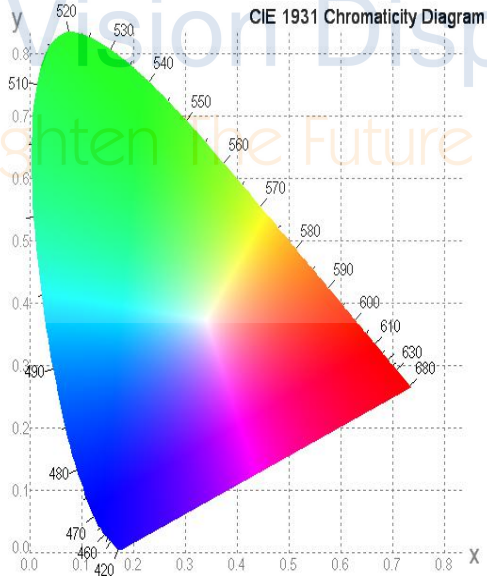

11.6 Definition of Surface Luminance, Uniformity and Transmittance

Using the transmissive mode measurement approach, measure the white screen luminance of the display panel and backlight.


11.6.1 Surface Luminance: LV = average (LP1:LP9)

11.6.2 Uniformity = Minimal (LP1:LP9) / Maximal (LP1:LP9) * 100%

11.6.3 Transmittance = LV on LCD / LV on Backlight * 100%

Note :Measuring machine:BM-7

Next Vision Display
Brighten the Future

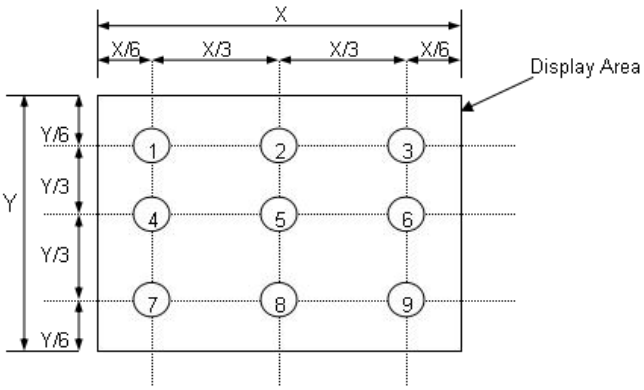

12 Quality Assurance

12.1 Purpose

This standard for Quality Assurance assures the quality of LCD module products supplied to customer by Iexcellence display.

12.2 Agreement Items

Iexcellence and customer shall negotiate if the following situation occurs:

12.2.1 Discrepancies between Iexcellence 's QA standards and customer's QA standards.

12.2.2 Additional requirement to be added in product specification.

12.2.3 Any other special problem.


12.3 Standard of the Product Visual Inspection


12.3.1 Appearance inspection:

12.3.1.1 The inspection must be under illumination about 1000 – 1500 lx, and the distance of view must be at 30cm ± 2cm.

12.3.1.2 The viewing angle should be 45° from the vertical line without reflection light or follows customer's viewing angle specifications.

12.3.1.3 Definition of area: A Zone: Active Area, B Zone: Viewing Area.

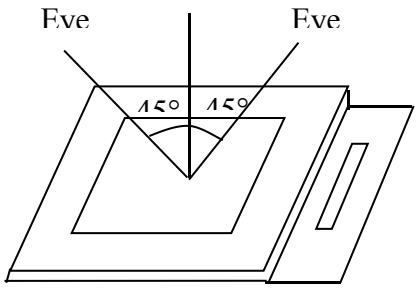

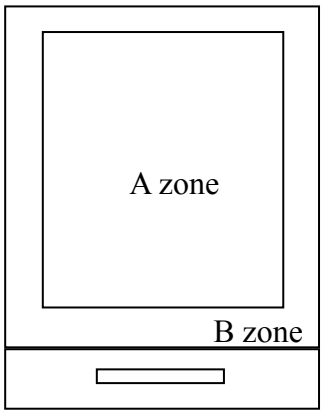

12.3.2 Basic principle:A set of sample to indicate the limit of acceptable quality level must be discussed by both Iexcellence and customer when there is any dispute happened.


Next Vision Display
Brighten The Future


12.4 Inspection Specification

Sampling plan according to GB/T2828.1-2012/ISO 2859-1：1999 and ANSI/ASQC Z1.4-1993,normal level 2 and based on:

Major defect: AQL 0.65





Minor defect: AQL 1.5

<table>
<tr><th>No.</th><th>Item</th><th>Criteria (Unit: mm)</th></tr>
<tr><td>01</td><td>Black / White spot
Foreign material
(Round type)
Pinholes Stain
Particles inside cell.
(Minor defect)</td><td>

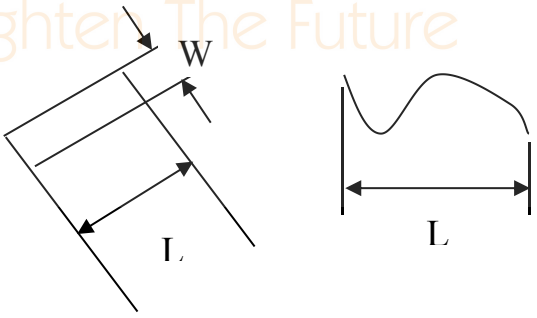



φ= (a + b) /2
<table>
<tr><th>Size \ Area</th><th>Acc. Qty</th></tr>
<tr><td>φ≤0.10</td><td>Ignore</td></tr>
<tr><td>0.10<φ≤0.15</td><td>2</td></tr>
<tr><td>0.15<φ≤0.20</td><td>1</td></tr>
<tr><td>0.20<φ</td><td>0</td></tr>
<tr><td>Total</td><td>2 no include φ≤ 0.10</td></tr>
</table>
Distance between 2 defects should more than 5mm apart.
</td></tr>
<tr><td>02</td><td>Black and White line
Scratch
Foreign material
(Line type)
(Minor defect)</td><td>


<table>
<tr><th>Length</th><th>Width</th><th>Acc. Qty</th></tr>
<tr><td>/</td><td>W ≦ 0.03</td><td>Ignore</td></tr>
<tr><td>L ≦ 2</td><td>0.03 ＜ W ≦ 0.05</td><td>1</td></tr>
<tr><td>/</td><td>0.05 ＜ W</td><td>0</td></tr>
<tr><td colspan="2">Total</td><td>1</td></tr>
</table>
Distance between 2 defects should more than 3mm apart.
Scratches not viewable through the back of the display are acceptable.
</td></tr>
</table>

Next Vision Display
Brighten The Future
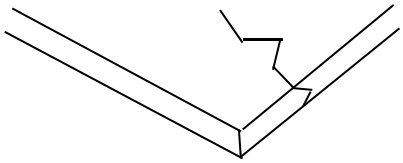
<table>
<tr><th>No.</th><th>Item</th><th>Criteria (Unit: mm)</th></tr>
<tr><td>03</td><td>Glass Crack
(Minor defect)</td><td>
LCD with extensible crack line is unacceptable(When press the cracked LCD area, the line will expand, we define it is extensible crack line)</td></tr>
<tr><td>04</td><td>Glass Chipping Pad Area: (Minor defect)
</td><td><table><tr><td>Length and Width</td><td>Acc. Qty</td></tr><tr><td>c ＜ 5.0, b< 0.4</td><td>Ignore</td></tr></table></td></tr>
<tr><td>05</td><td>Glass Chipping Rear of Pad Area:
(Minor defect)
</td><td><table><tr><td>Length and Width</td><td>Acc. Qty</td></tr><tr><td>c > 3.0, b< 1.0</td><td>1</td></tr><tr><td>c< 3.0, b< 1.0</td><td>2</td></tr><tr><td>c< 3.0, b< 0.5</td><td>4</td></tr><tr><td colspan="2">a<Glass Thickness</td></tr></table></td></tr>
<tr><td>06</td><td>Glass Chipping Except Pad Area:
(Minor defect)
</td><td><table><tr><td>Length and Width</td><td>Acc. Qty</td></tr><tr><td>c ≤0.6, b< 5.0</td><td>Ignore</td></tr><tr><td colspan="2">a<Glass Thickness</td></tr></table></td></tr>
</table>

Next Vision Display
Brighten The Future

<table>
<tr><th>No.</th><th>Item</th><th>Criteria (Unit: mm)</th></tr>
<tr><td>07</td><td>Glass Corner Chipping:
(Minor defect)
</td><td><table><tr><td>Length and Width</td><td>Acc. Qty</td></tr><tr><td>c < 2.0, b< 1.5</td><td>Ignore</td></tr><tr><td>c < 1.5, b< 2</td><td>Ignore</td></tr><tr><td colspan="2">a<Glass Thickness</td></tr></table></td></tr>
<tr><td>08</td><td>Glass Burr:
(Minor defect)
</td><td>Glass burr don’t affect assemble and module dimension.
<table><tr><td>Length</td><td>Acc. Qty</td></tr><tr><td>F < 0.5</td><td>Ignore</td></tr></table></td></tr>
<tr><td>09</td><td>FPC Defect:
(Minor defect)
</td><td>9.1 Dent, pinhole width a<w/3.
(w: circuitry width.)
9.2 Open circuit is unacceptable.
9.3 No oxidation, contamination and distortion.</td></tr>
<tr><td>10</td><td>Bubble on Polarizer
(Minor defect)</td><td><table><tr><td>Diameter</td><td>Acc. Qty</td></tr><tr><td>φ≤0.10</td><td>Ignore</td></tr><tr><td>0.1 <φ≤0.15</td><td>2</td></tr><tr><td>0.15 <φ≤0.2</td><td>1</td></tr><tr><td>0.2 < φ</td><td>None</td></tr></table></td></tr>
<tr><td>11</td><td>Dent on Polarizer
(Minor defect)</td><td><table><tr><td>Diameter</td><td>Acc. Qty</td></tr><tr><td>φ≤0.10</td><td>Ignore</td></tr><tr><td>0.1 <φ≤0.15</td><td>2</td></tr><tr><td>0.15 <φ≤0.2</td><td>1</td></tr><tr><td>0.2 < φ</td><td>None</td></tr></table></td></tr>
<tr><td>12</td><td>Bezel</td><td>12.1 No rust, distortion on the Bezel.
12.2 No visible fingerprints, stains or other contamination.</td></tr>
</table>

Next Vision Display
Brighten The Future

No.	Item	Criteria (Unit: mm)
13	Touch Panel	D: Diameter W: width L: length 13.1 Spot: D≤0.20 is acceptable 0.20<D≤0.3, acceptable QTY, 3 2dots are acceptable and the distance between defects should more than 10 mm. D>0.3 is unacceptable 13.2 Dent: D>0.30 is unacceptable 13.3 Scratch: W≤0.03, L≤10 is acceptable, 0.03<W≤0.10, L≤10 ,acceptable QTY, 3 Distance between 2 defects should more than 10 mm. W>0.10 is unacceptable.
14	PCB	14.1 No distortion or contamination on PCB terminals. 14.2 All components on PCB must same as documented on the BOM/component layout. 14.3 Follow IPC-A-600F.
15	Soldering	Follow IPC-A-610C standard
16	Electrical Defect (Major defect)	The below defects must be rejected. 16.1 Missing vertical / horizontal segment, 16.2 Abnormal Display. 16.3 No function or no display. 16.4 Current exceeds product specifications. 16.5 LCD viewing angle defect. 16.6 No Backlight. 16.7 Dark Backlight. 16.8 Touch Panel no function. 16.9 Dark Dot –one Allowed. 16.10 Bright Dot – one Allowed. Remark: 1. A pixel defect is acceptable if one color is none functional and causes a bright dot. The display may have one case where one color is out and cause a dark dot. 2. Bright dot caused by scratch and foreign object accords to item1.

Next Vision Display
Brighten the Future

No.	Item	Criteria (Unit: mm)
17	Screen deformation 	Test for insertion of plug gauge at highest warping point： (0.9-4 .5 inches does not contain 4.5) H≦0.2MM (4.5-5.5 inches) H≦0.3MM Decision OK

Remark: Visual and cosmetic defects are rejectable only if these fall within the LCD viewing area.

12.5 Classification of Defects

Visual defects (Except no / wrong label) are treated as minor defect and electrical defect is major.

12.6 Identification/marking criteria

Any unit with illegible / wrong /double or no marking/ label shall be rejected.

12.7 Packing

12.7.1 There should be no damage of the outside carton box, each packaging box should has label in the correct location per packing drawing requirement.

12.7.2 All direct package materials shall offer ESD protection.

Next Vision Display
Brighten The Future

13 Reliability Specification

Item	Condition	Cycle Time	Quantity	Remark
Constant Temp. and Constant Humidity Operation Test	+40 ± 3ºC,90 ± 3%RH	120hrs	--	*1
High Temp. Operation Test	+70 ± 3ºC	120hrs	--	
Low Temp. Operation Test	-20 ± 3ºC	120hrs	--	
Thermal Shock Test	-20 ± 3ºC (30min) +70 ± 3ºC (30min)	10cycles	--	
ESD Test(end product)	150pF, 330Ω, ±2KV, Contact 150pF, 330Ω, ±6KV, Air	10times	--	*2, *3
Vibration Test (for packaging)	Frequency: 10Hz to 55Hz to10Hz,Swing:1.5mm,time：X,Y,Z each 2H.	6hrs	One inner carton	*4

Note 1. For humidity test, DI water should be used.

Inspection Standard: Inspect after 1-2hrs storage at room temperature, the sample shall be free from the following defects:

- Air bubble in the LCD
- Seal Leakage
- Non-display
- Missing Segment
- Glass Crack
- IDD is greater than twice initial value.
- Others as per QA Inspection Criteria

Note 2. No defect is allowed after testing

The End Product ESD value is only indicative and depends on customer ESD protection design for the whole system.

Note 3. ESD should be applied to LCD glass panel, not other areas (such as on IC and so on) IDD should be within twice initial value.

In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.

Note 4. Only upon request.

Next Vision Display
Brighten The Future

14 Precautions and Warranty

14.1 Safety

14.1.1 The liquid crystal in the LCD is poisonous. Do not put it in your mouth. If the liquid crystal touches your skin or clothes, wash it off immediately using soap and water.

14.1.2 Since the liquid crystal cells are made of glass, do not apply strong impact on them. Handle with care.

14.2 Handling

14.2.1 Reverse and use within ratings in order to keep performance and prevent damage.

14.2.2 Do not wipe the polarizer with dry cloth, as it might cause scratch. If the surface of the LCD needs to be cleaned, wipe it swiftly with cotton or other soft cloth soaked with petroleum IPA, do not use other chemicals.

14.3 Operation

14.3.1 Do not drive LCD with DC voltage

14.3.2 Response time will increase below lower temperature

14.3.3 Display may change color with different temperature

14.3.4 Mechanical disturbance during operation, such as pressing on the display area, may cause the segments to appear “fractured”.

14.4 Static Electricity

14.4.1 CMOS LSIs are equipped in this unit, so care must be taken to avoid the electro-static charge, by ground human body, etc.

14.4.2 The normal static prevention measures should be observed for work clothes and benches.

14.4.3 The module should be kept into anti-static bags or other containers resistant to static for storage.

14.5 Limited Warranty

15 Packaging

TBD

16 Prior Consult Matter

1. For DISPLAY standard products, we keep the right to change material, process for improving the product property without prior notice to our customer.

2. For OEM products, if any changes are needed which may affect the product property, we will consult with our customer in advance.

3. If you have special requirement about reliability condition, please let us know before you start the test on our samples.

Next Vision Display
Brighten The Future