


8. Outline Dimension


REV	DESCRIPTION	DATE
01	FIRST ISSUE	2012/10/27

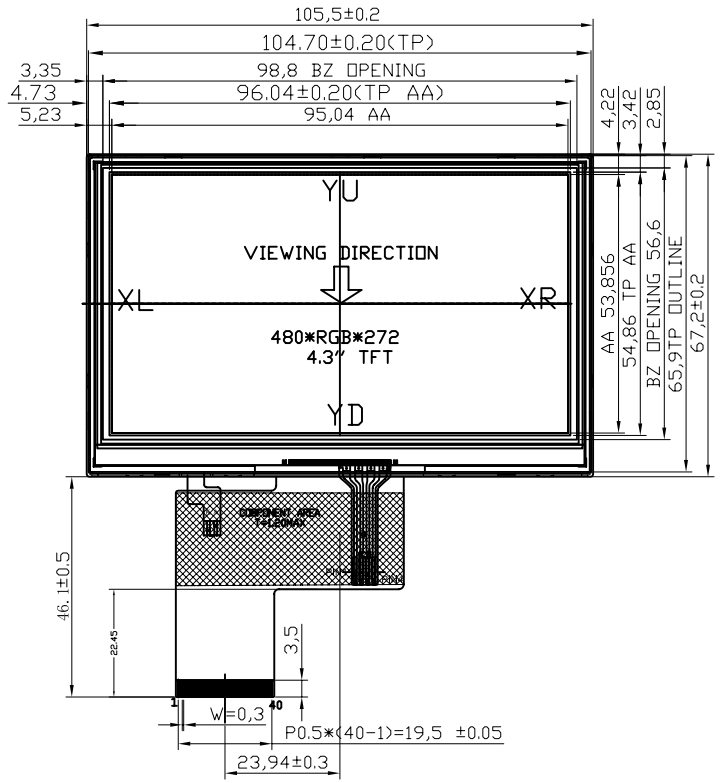

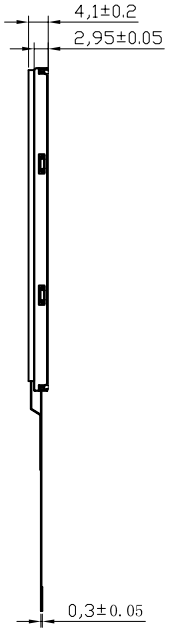

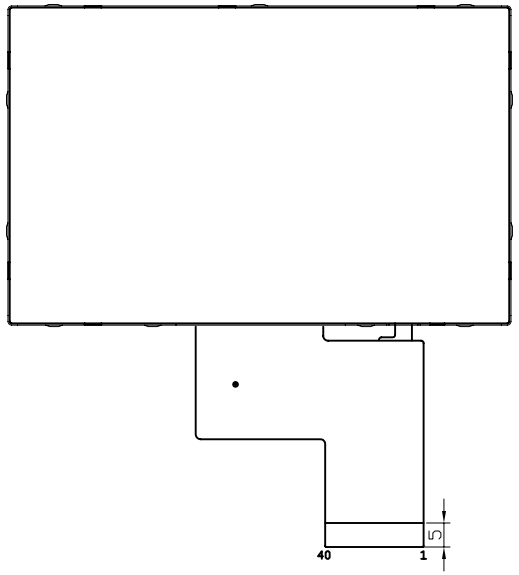

PIN	SYMBLE
1	LEDK
2	LEDA
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU



CIRCUIT DIAGRAM

逻辑表

PIN	WIRING
1	YU
2	XL
3	YD
4	XR

NOTES:
1.Display Type: 262K COLOR 4.3"TFT LCD
Transmissive, NORMAL WHITE
2.Typical Lumiance: 360cd/m²
3.Operating TEMP: −20°C~70°C
4.Storage TEMP: −30°C~80°C
5.Backlight :10 Chip−white LED
6.IC: OTA5180A
7.Viewing Direction: 12 O'CLOCK
8.Undefined tolerances: ±0.20
9.The product should measure up with RoHS standard

DIMENSION \ LEVEL	GENERAL LINEAR TOLERANCE 1	2	3	SELECT LEVEL
0 ~ 4	0.05	0.1	0.2	
4 ~ 14	0.1	0.2	0.3	
14 ~ 63	0.1	0.3	0.4	
63 ~ 250	0.2	0.4	0.6	NA
250 ~ 600		0.6	1.0	
600 ~ 4000			1.6	
LEVEL	GENERAL ANGULAR TOLERANCE 1	2	3	SELECT LEVEL
RANGE				

Rocktech Displays Limited	UNIT: mm	SCALE: 1:1	3rd ANGLE
	MODEL NAME:		
PART NUMBER: RK043FN02H-T			
MATERIAL:			
DESIGNED: LI TANG	2012/10/27	SIZE: A4	SHEET NUMBER: 1of1
APPROVED:		CRITICAL DIMENSION / SPEC DIMENSION	REVISION: V1.0

www.rocktech.com.hk

first FC components
FIRST Components s.r.l. Via Cavour, 69 21020 Buguggiate (VA) Italy Tel. +39 0332 1888005 Fax +39 0332 320856
web: www.first-components.com