
EVERVISION VGG322404-B-FC



Pin No.	Symbol
31	VSS
32	R2
33	R1
34	R0
35	NC
36	VSS
37	NC
38	NC
39	NC
40	NC


Pin No.	Symbol
1	VCC
2	VCC
3	VCC
4	VCC
5	NC
6	DEN
7	VSS
8	DCLK
9	VSS
10	NC
11	VSS
12	B5
13	B4
14	B3
15	VSS
16	B2
17	B1
18	B0
19	VSS
20	G5
21	G4
22	G3
23	VSS
24	G2
25	G1
26	G0
27	VSS
28	R5
29	R4
30	R3

EVERVISION ELECTRONICS CO.,LTD

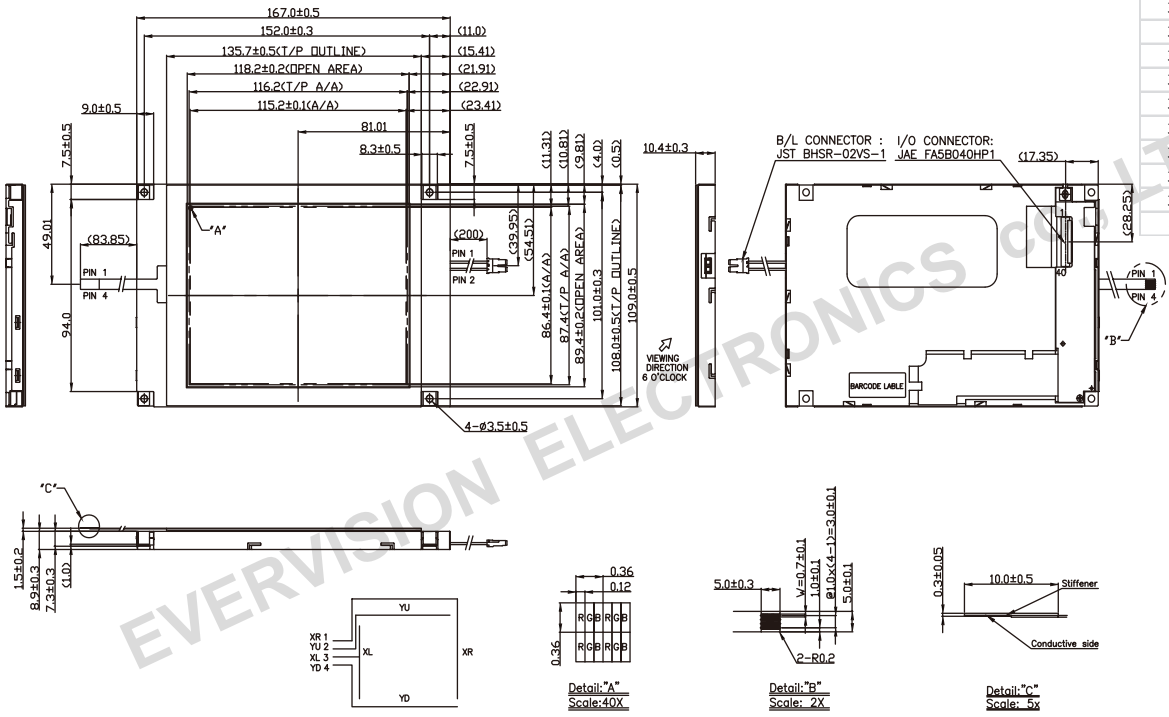

Feature

1. 5.7 inches Color TFT
2. View Direction：6 o'clock
3. Interface：TTL RGB
4. Luminance：270 nits (Typ.)
5. Touch Panel ： Resistive
6. Top -20~70°C；Tst -30~80°C

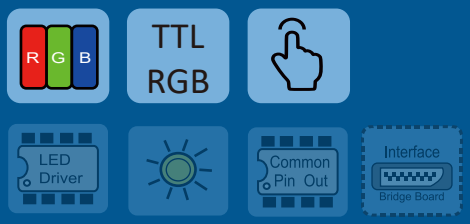

Mechanical Data

Item	Specifications	Unit
Outline Dimension	167.0 x 109.0 x 10.4	mm
Display Format	320RGB x 240	dot
Active Area	115.2 x 86.4	mm
Dot Size	0.120 x 0.360	mm

Electrical Characteristics (Operating conditions)

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	3.0	3.3	3.6	V

Electrical Characteristics (B/L driving conditions)

Item	Symbol	Min	Typ	Max	Unit
B/L Voltage	VB	-	23.1	-	V
B/L Current	IB	-	60	-	mA

FIRST Components s.r.l. Via Cavour, 69 21020 Buguggiate (VA) Italy Tel. +39 0332 1888005 Fax +39 0332 320856
web: www.first-components.com