
EVERVISION VGG322426-G-FC

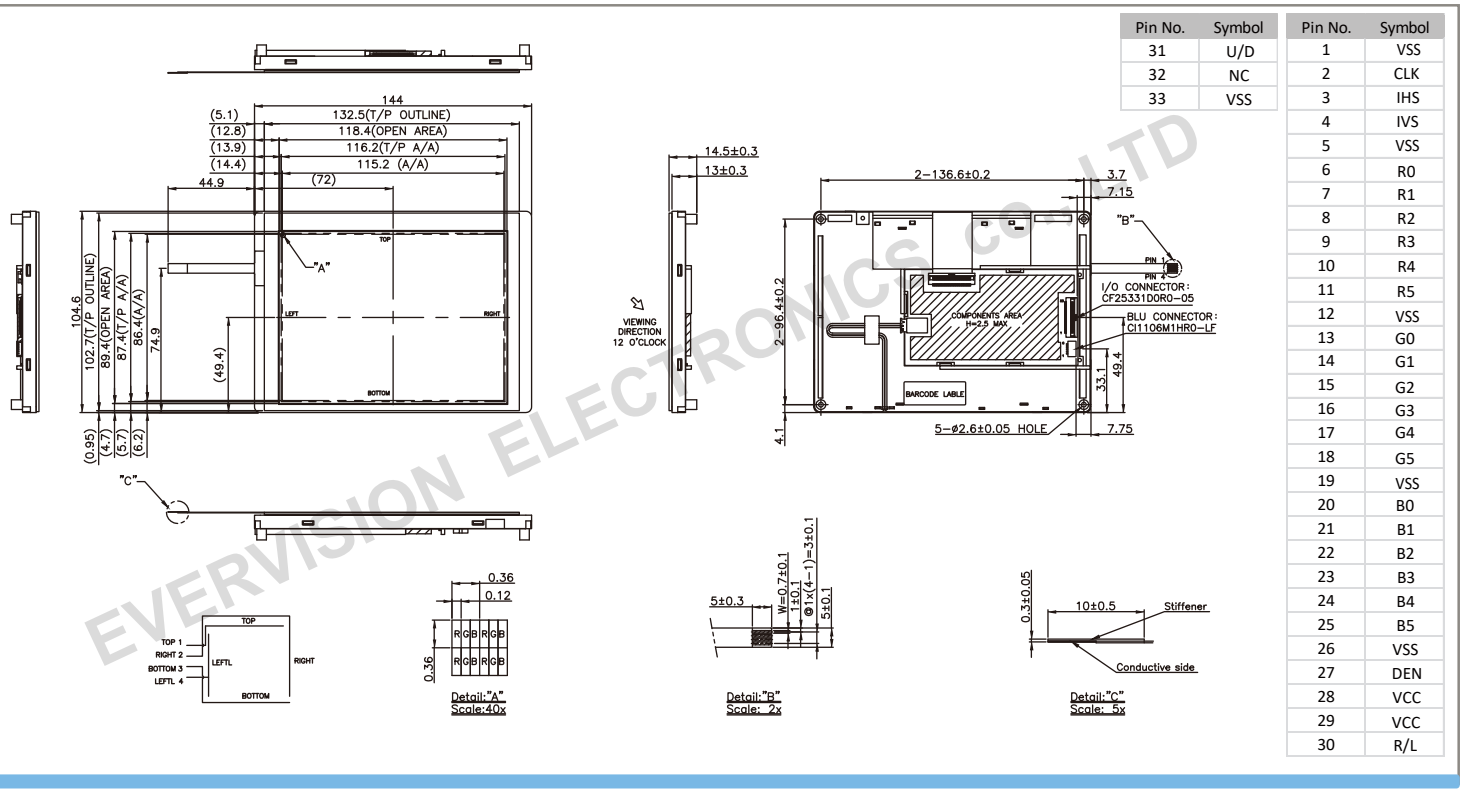


Pin No.	Symbol
31	U/D
32	NC
33	VSS

Pin No.	Symbol
1	VSS
2	CLK
3	IHS
4	IVS
5	VSS
6	R0
7	R1
8	R2
9	R3
10	R4
11	R5
12	VSS
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	VSS
20	B0
21	B1
22	B2
23	B3
24	B4
25	B5
26	VSS
27	DEN
28	VCC
29	VCC
30	R/L

EVERVISION ELECTRONICS CO.,LTD

Feature

1. 5.7 inches Color TFT
2. View Direction：12 o'clock
3. Interface：TTL RGB
4. Luminance：925 nits (Typ.)
5. Touch Panel：Resistive
6. Top -20~70°C；Tst -30~80°C

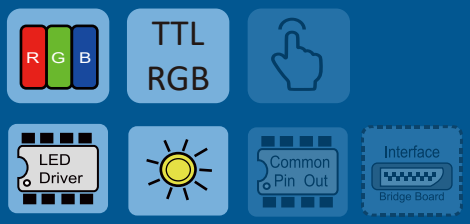

Mechanical Data

Item	Specifications	Unit
Outline Dimension	144.0 x 104.6 x 13.0	mm
Display Format	320RGB x 240	dot
Active Area	115.2 x 86.4	mm
Pixel Pitch	0.360 x 0.360	mm

Electrical Characteristics (Operating conditions)

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	3.0	3.3	3.6	V
Supply Current	ICC	-	27.0	37.8	mA

Electrical Characteristics (LED driving conditions)

Item	Symbol	Min	Typ	Max	Unit	Note
LED Driver Current	$I_{LED(DU)}$	-	500	700	mA	I_{LED}=200mA, V_{LED}=5V
LED Driver Current	$I_{LED(DU)}$	-	230	322	mA	I_{LED}=200mA, V_{LED}=12V

FIRST Components s.r.l. Via Cavour, 69 21020 Buguggiate (VA) Italy Tel. +39 0332 1888005 Fax +39 0332 320856
web: www.first-components.com