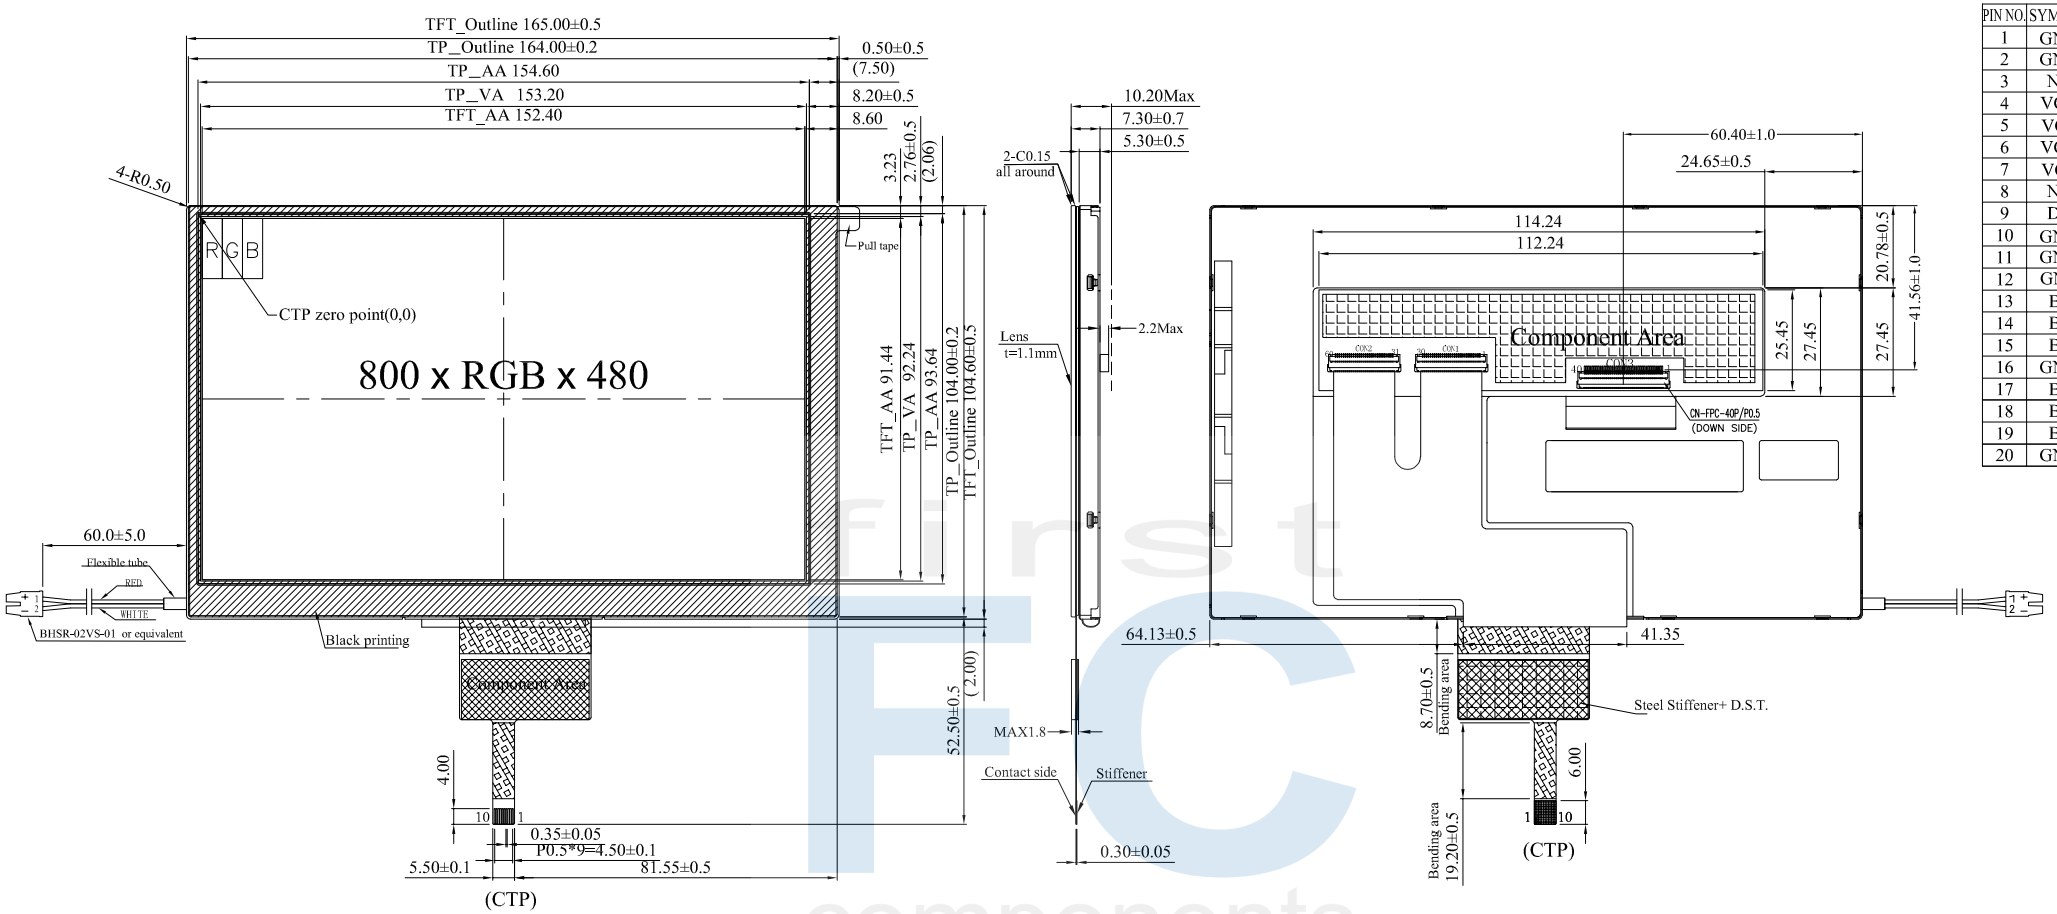


CON3

PIN NO.	SYMBOL	PIN NO.	SYME
1	GND	21	G
2	GND	22	G
3	NC	23	G
4	VCC	24	GN
5	VCC	25	G
6	VCC	26	G
7	VCC	27	G
8	NC	28	GN
9	DE	29	R
10	GND	30	R
11	GND	31	R
12	GND	32	GN
13	B5	33	R
14	B4	34	R
15	B3	35	R
16	GND	36	GN
17	B2	37	GN
18	B1	38	DCI
19	B0	39	GN
20	GND	40	GN


B/L

PIN NO.	SYME
1	VLE
2	VLE

CTP

PIN NO.	SYMB
1	VSS
2	VDD
3	SCL
4	NC
5	SDA
6	NC
7	/RST
8	NC
9	/INT
10	VSS

1	Lcd Type	TFT
2	Viewing Direction	12 O'clock
3	Gray Scale Inversion Direction	6 O'clock
4	Surface	Glare
5	Screen size	7.0"(diagonal)
6	Display format	800 x RGB x 480
7	Operating Temperature	-20°C ~70°C
8	Storage Temperature	-30°C ~80°C
9	Active area	152.4(W) X 91.44(H)
10	Pixel pitch	0.1905(W) x 0.1905(H) mm
11	Color arrangement	RGB-STRIPE
12	Brightness	250min. 400typ. cd/m2 Ⓐ
13	CTP Driver IC	ILI2130 or equivalent
14	CTP Resolution	16384*1638



3*8=24LED

Ⓐ	Brightness adjustment
Rev	Revision note

The non-specified tolerance of dimension is ±0.3 mm .

SCALE: 1/1	UNIT: mm		
REV: A	PAGE: 1/1		
APPROVED	梁榮智 2022.08.15	MODEL	WF70-800480C4D#003-FC
CHECKED	蔡宜珍 2022.08.15	TITLE	TFT MODULE
DRAWN	lico 2022.08.15	DWG NO.	T-110728