Next Vision Display
Brighten The Future

NEXT VISION DISPLAY

SPECIFICATION

CUSTOMER : _____

MODULE NO.: NT070-N002ME-C

Version	V03
Engineer	
Date	2022/03/12

Next Vision Display
Brighten The Future

Customer:
Approved by

NEXT VISION DISPLAY CO., LTD.

地址: 中國上海小木橋路600號
ADD: 600 XIAO MU QIAO ROAD, SHANGHAI, CHINA

WEB: www.nextvisiondisplay.com

TECHNICAL: technical@nextvisiondisplay.com
MARKETING: marketing@nextvisiondisplay.com
SALES: sales@nextvisiondisplay.com

Represented by:

first FC components
FIRST Components s.r.l.
www.first-components.com
sales@first-components.com
+39 0332 1888005

1. General Specifications

No.	Item	Specification	Remark
1	LCD size	7.0 inch(Diagonal)	
2	Driver element	a-Si TFT active matrix	
3	Resolution	800X3(RGB)X480	
4	Display mode	Normally Black	
5	Dot pitch	0.0635(W)X0.1905(H) mm	
6	Active area	152.4 (W)X91.44 (H) mm	
7	Module size	181.2(W)X105.24(H)X5.5 (D) mm	No te 1
8	Surface treatment	Anti-Glare	
9	Color arrangement	RGB-stripe	
10	Interface	Digital (TTL)	
11	Backlight power consumption	1.5W (Typ.)	Note 2
12	Panel power consumption	0.66 W (Typ.)	Note 3
13	Weight	T.B.D.	

Note 1: Refer to Mechanical Drawing.
Note 2: Including LED Driver power consumption.
Note 3: Including T-con power consumption.

Next Vision Display
Brighten The Future

2. Pin Assignment

Pin No.	Symbol	Description	Remark
1	GND	Power Ground	
2	GND	Power Ground	
3	NC	Not Connect	
4	Vcc	Power Supply for Digital Circuit	
5	Vcc	Power Supply for Digital Circuit	
6	Vcc	Power Supply for Digital Circuit	
7	Vcc	Power Supply for Digital Circuit	
8	NC	Not Connect	
9	DE	Data Enable	
10	GND	Power Ground	
11	GND	Power Ground	
12	GND	Power Ground	
13	B5	Blue Data 5 (MSB)	
14	B4	Blue Data 4	
15	B3	Blue Data 3	
16	GND	Power Ground	
17	B2	Blue Data 2	
18	B1	Blue Data 1	
19	B0	Blue Data 0 (LSB)	
20	GND	Power Ground	
21	G5	Green Data 5 (MSB)	
22	G4	Green Data 4	
23	G3	Green Data 3	
24	GND	Power Ground	
25	G2	Green Data 2	
26	G1	Green Data 1	
27	G0	Green Data 0 (LSB)	
28	GND	Power Ground	
29	R5	Red Data 5 (MSB)	
30	R4	Red Data 4	
31	R3	Red Data 3	
32	GND	Power Ground	
33	R2	Red Data 2	
34	R1	Red Data 1	
35	R0	Red Data 0 (LSB)	
36	GND	Power Ground	
37	GND	Power Ground	
38	DCLK	Clock Signals ; Latch Data at the Falling Edge	
39	GND	Power Ground	
40	GND	Power Ground	

Note: User's connector part number is **MT-FP430N-2FR** manufactured by UJU or equivalent.


Next Vision Display
Brighten The Future

Backlight Driving Part

Pin No.	Symbol	Description
1	VLED+	Red, LED_ Anode
2	VLED-	White, LED_ Cathode


Note: The backlight interface connector is a model **SM02B-BHSS-1-TB** manufactured by JST or equivalent. The matching connector part number is **BHSR-20VS-1** manufactured by JST or equivalent.

BLOCK DIAGRAM

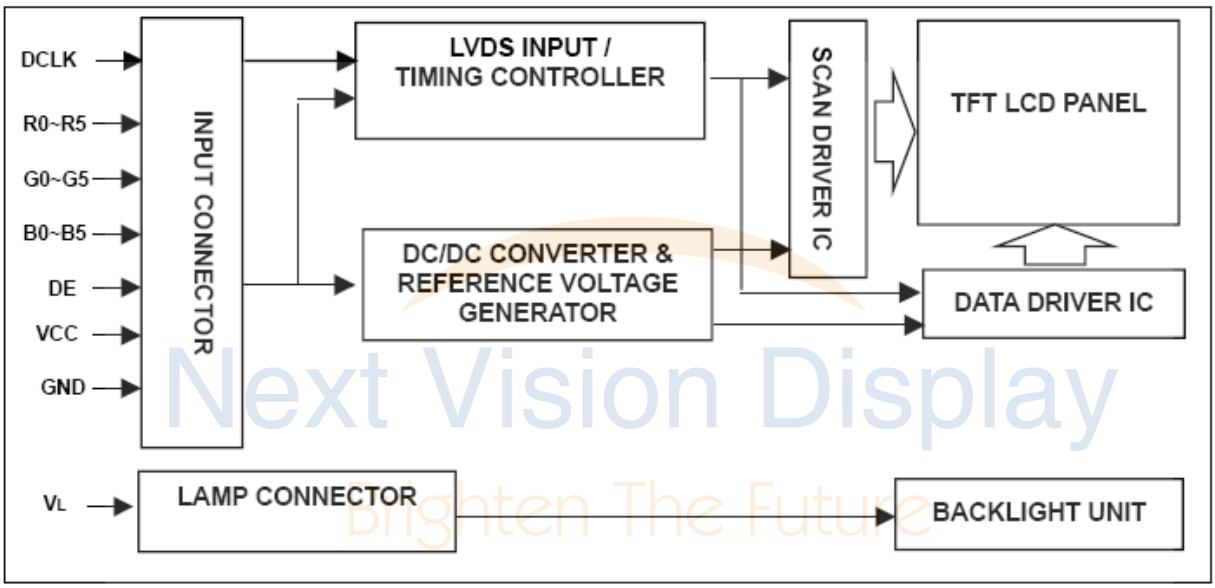

Next Vision Display
Brighten The Future

Scanning direction refer to the figure below.

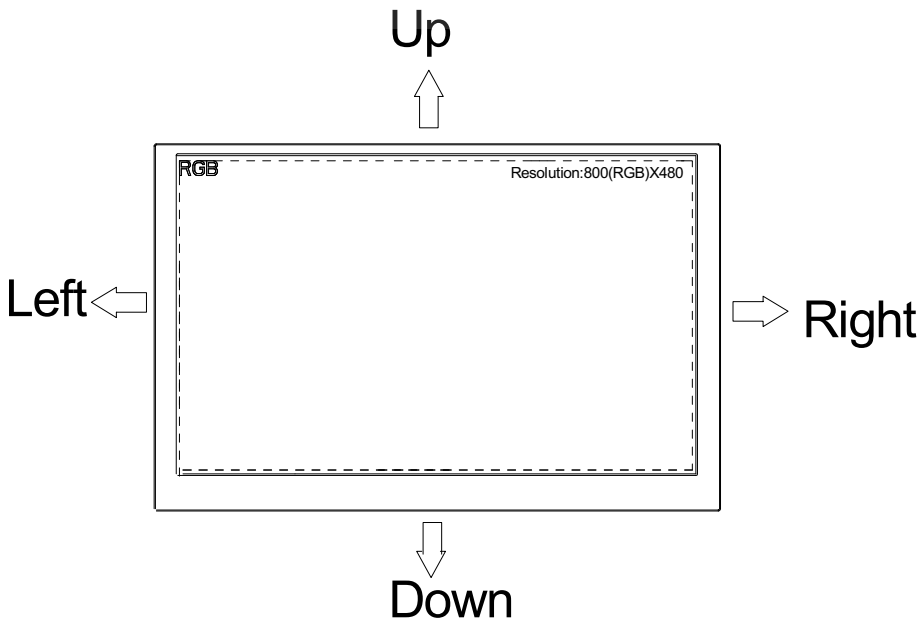


4. Optical Specifications


Item	Symbol	Condition	Values			Unit	Remark
			Min.	Typ.	Max.		
Viewing angle (CR≥ 10)	θ_L	Φ=180°(9 o'clock)	70	80	-	degree	Note 1
	θ_R	Φ=0°(3 o'clock)	70	80	-		
	θ_T	Φ=90°(12 o'clock)	70	80	-		
	θ_B	Φ=270°(6 o'clock)	70	80	-		
Response time	T_{ON}	Normal θ=Φ=0°	-	11	-	msec	Note 3
	T_{OFF}		-	9	-	msec	Note 3
Contrast ratio	CR		-	1000	-	-	Note 4
Color chromaticity	W_X		0.270	0.0290	0.350		Note 2 Note 5 Note 6
	W_Y		0.280	0.0300	0.360		
Luminance	L		-	500	-	cd/m^2	Note 6
Luminance uniformity	Y_U		70	75	-	%	Note 7

Next Vision Display
Brighten The Future


Front View

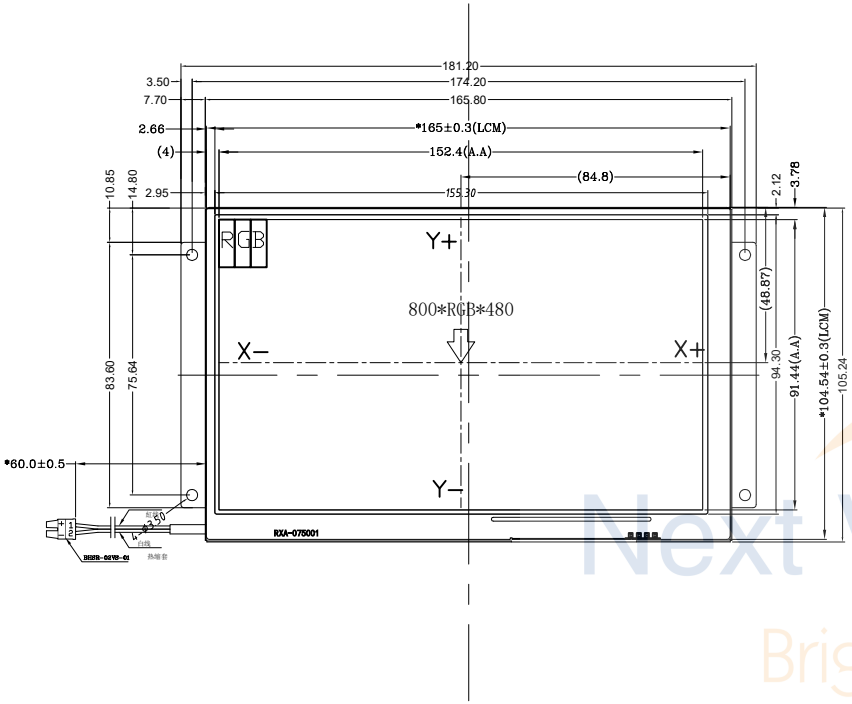

Side View

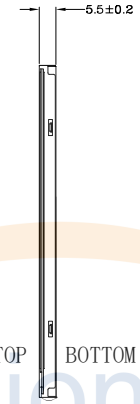


Back View

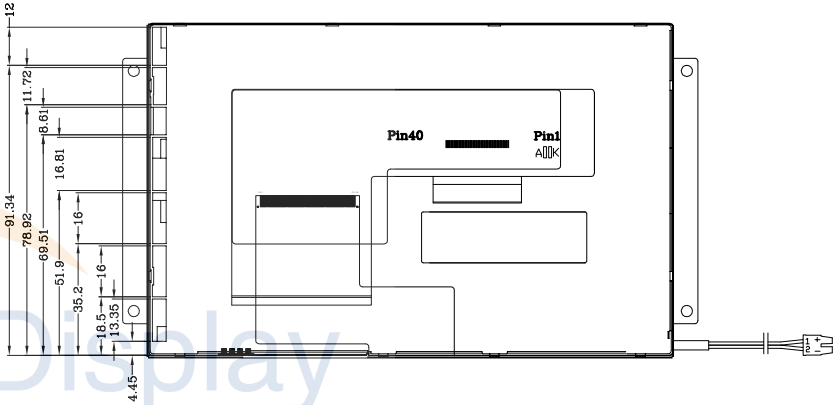


Pin	Symbol
1	GND
2	GND
3	NC
4	VCC
5	VCC
6	VCC
7	VCC
8	NC
9	DE
10	GND
11	GND
12	GND
13	B5
14	B4
15	B3
16	GND
17	B2
18	B1
19	B0
20	GND
21	G5
22	G4
23	G3
24	GND
25	G2
26	G1
27	G0
28	GND
29	R5
30	R4
31	R3
32	GND
33	R2
34	R1
35	R0
36	GND
37	GND
38	DCLK
39	GND
40	GND

Next Vision Display
Brighten The Future



NOTES:
1. GENERAL TOLERANCE: ±0.2
2. ( ) REFERENCE DIMENSION
3. RECOMMENDED CUSHION ADHERENT ARAE: TP V.A+1.6mm
4. REFERENCED DIMENSION: ( )
5. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS



Backlight Circuit
(3*8=24LED, 20mA/LED)

Display Type	TFT NORMALLY WHITE,TRANSMISSIVE
Viewing Angle	12:00 CLOCK
LCD Driver IC	8262+HX8678
Logic Voltage	VDD=3.3V
Operation Temperature	−20°C TO 70°C
Storage Temperature	−30°C TO 80°C
Interface	Digital RGB(6bits/color) Data Transfer
Backlight	24−LED WHITE 160mA/9.6V
Surface luminance	450cd/m2(TYP.)
White X/Y	X:0.29±0.04 Y:0.32±0.04

REF.	SYMBOL	AMENDMENT	DATE
V00.		First issue	2015.04.09

EE.CHECKED
APPROVED
CUSTOMER'S APPROVAL

TITLE: MODULE SPEC.

DRAWING NO. NT070-N002ME-C

UNIT mm | SCALE FIT | 3rd Angle | SHEET 1 OF 1