Next Vision Display
Brighten The Future

NEXT VISION DISPLAY

SPECIFICATION

CUSTOMER : _____

MODULE NO.: NT070-C001ME

Version	01
Engineer	
Date	2021/09/25

Next Vision Display
Brighten The Future

Customer:
Approved by

NEXT VISION DISPLAY CO., LTD.

地址: 中國上海小木橋路600號
ADD: 600 XIAO MU QIAO ROAD, SHANGHAI, CHINA

WEB: www.nextvisiondisplay.com

TECHNICAL: technical@nextvisiondisplay.com
MARKETING: marketing@nextvisiondisplay.com
SALES: sales@nextvisiondisplay.com

Represented by:

first FC components

FIRST Components s.r.l.
Via Cavour, 69 21020 Buguggiate (VA) Italy
Tel: +39 0332 1888005 Web: www.first.components.com

1. General Specifications

No.	Item	Specification	Remark
1	LCD size	7.0 inch(Diagonal)	
2	Driver element	a-Si TFT active matrix	
3	Resolution	800X3(RGB)X480	
4	Display mode	Normally Black	
5	Dot pitch	0.0635(W)X0.1905(H) mm	
6	Active area	152.4 (W)X91.44 (H) mm	
7	Module size	165(W)X104.09(H)X6.9 (D) mm	Note 1
8	Surface treatment	Anti-Glare	
9	Color arrangement	RGB-stripe	
10	Interface	Digital (TTL)	
11	Backlight power consumption	1.5W (Typ.)	Note 2
12	Panel power consumption	0.66 W (Typ.)	Note 3
13	Weight	T.B.D.	

Note 1: Refer to Mechanical Drawing.
Note 2: Including LED Driver power consumption.
Note 3: Including T-con power consumption.

Next Vision Display
Brighten The Future

2. Pin Assignment

Pin No.	Symbol	Description	Remark
1	GND	Power Ground	
2	GND	Power Ground	
3	NC	Not Connect	
4	Vcc	Power Supply for Digital Circuit	
5	Vcc	Power Supply for Digital Circuit	
6	Vcc	Power Supply for Digital Circuit	
7	Vcc	Power Supply for Digital Circuit	
8	NC	Not Connect	
9	DE	Data Enable	
10	GND	Power Ground	
11	GND	Power Ground	
12	GND	Power Ground	
13	B5	Blue Data 5 (MSB)	
14	B4	Blue Data 4	
15	B3	Blue Data 3	
16	GND	Power Ground	
17	B2	Blue Data 2	
18	B1	Blue Data 1	
19	B0	Blue Data 0 (LSB)	
20	GND	Power Ground	
21	G5	Green Data 5 (MSB)	
22	G4	Green Data 4	
23	G3	Green Data 3	
24	GND	Power Ground	
25	G2	Green Data 2	
26	G1	Green Data 1	
27	G0	Green Data 0 (LSB)	
28	GND	Power Ground	
29	R5	Red Data 5 (MSB)	
30	R4	Red Data 4	
31	R3	Red Data 3	
32	GND	Power Ground	
33	R2	Red Data 2	
34	R1	Red Data 1	
35	R0	Red Data 0 (LSB)	
36	GND	Power Ground	
37	GND	Power Ground	
38	DCLK	Clock Signals ; Latch Data at the Falling Edge	
39	GND	Power Ground	
40	GND	Power Ground	

Note: User's connector part number is **MT-FP430N-2FR** manufactured by UJU or equivalent.


Next Vision Display
Brighten The Future

4. Optical Specifications


Item	Symbol	Condition	Values			Unit	Remark
			Min.	Typ.	Max.		
Viewing angle (CR≥ 10)	θ_L	Φ=180°(9 o'clock)	70	80	-	degree	Note 1
	θ_R	Φ=0°(3 o'clock)	70	80	-		
	θ_T	Φ=90°(12 o'clock)	70	80	-		
	θ_B	Φ=270°(6 o'clock)	70	80	-		
Response time	T_{ON}	Normal θ=Φ=0°	-	11	-	msec	Note 3
	T_{OFF}		-	9	-	msec	Note 3
Contrast ratio	CR		800	1000	-	-	Note 4
Color chromaticity	W_X		0.270	0.0290	0.350		Note 2 Note 5 Note 6
	W_Y		0.280	0.0300	0.360		
Luminance	L		-	300	-	cd/m ^{2}	Note 6
Luminance uniformity	Y_U		70	75	-	%	Note 7

Next Vision Display
Brighten The Future

7. Mechanical Drawing

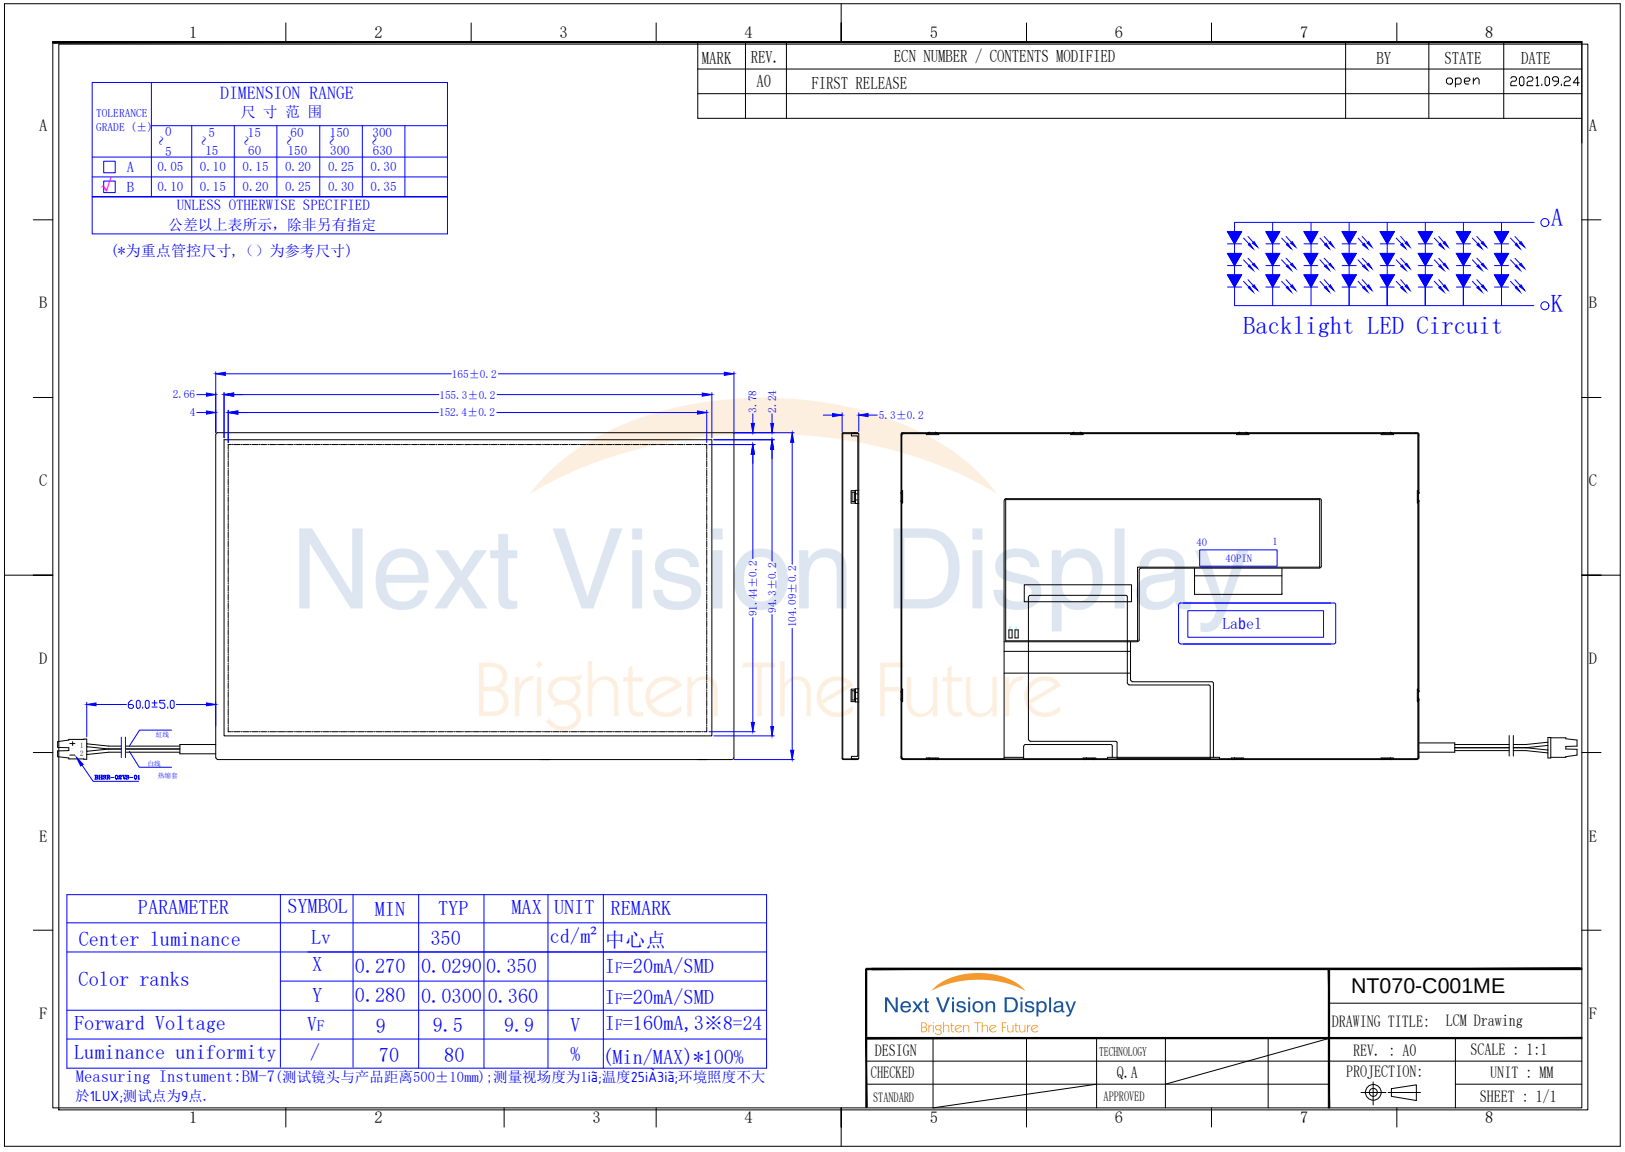

版本	变更日期	变更内容	变更人
01	2016-10-17	first release	
02	2016-10-25	change VA dimension	

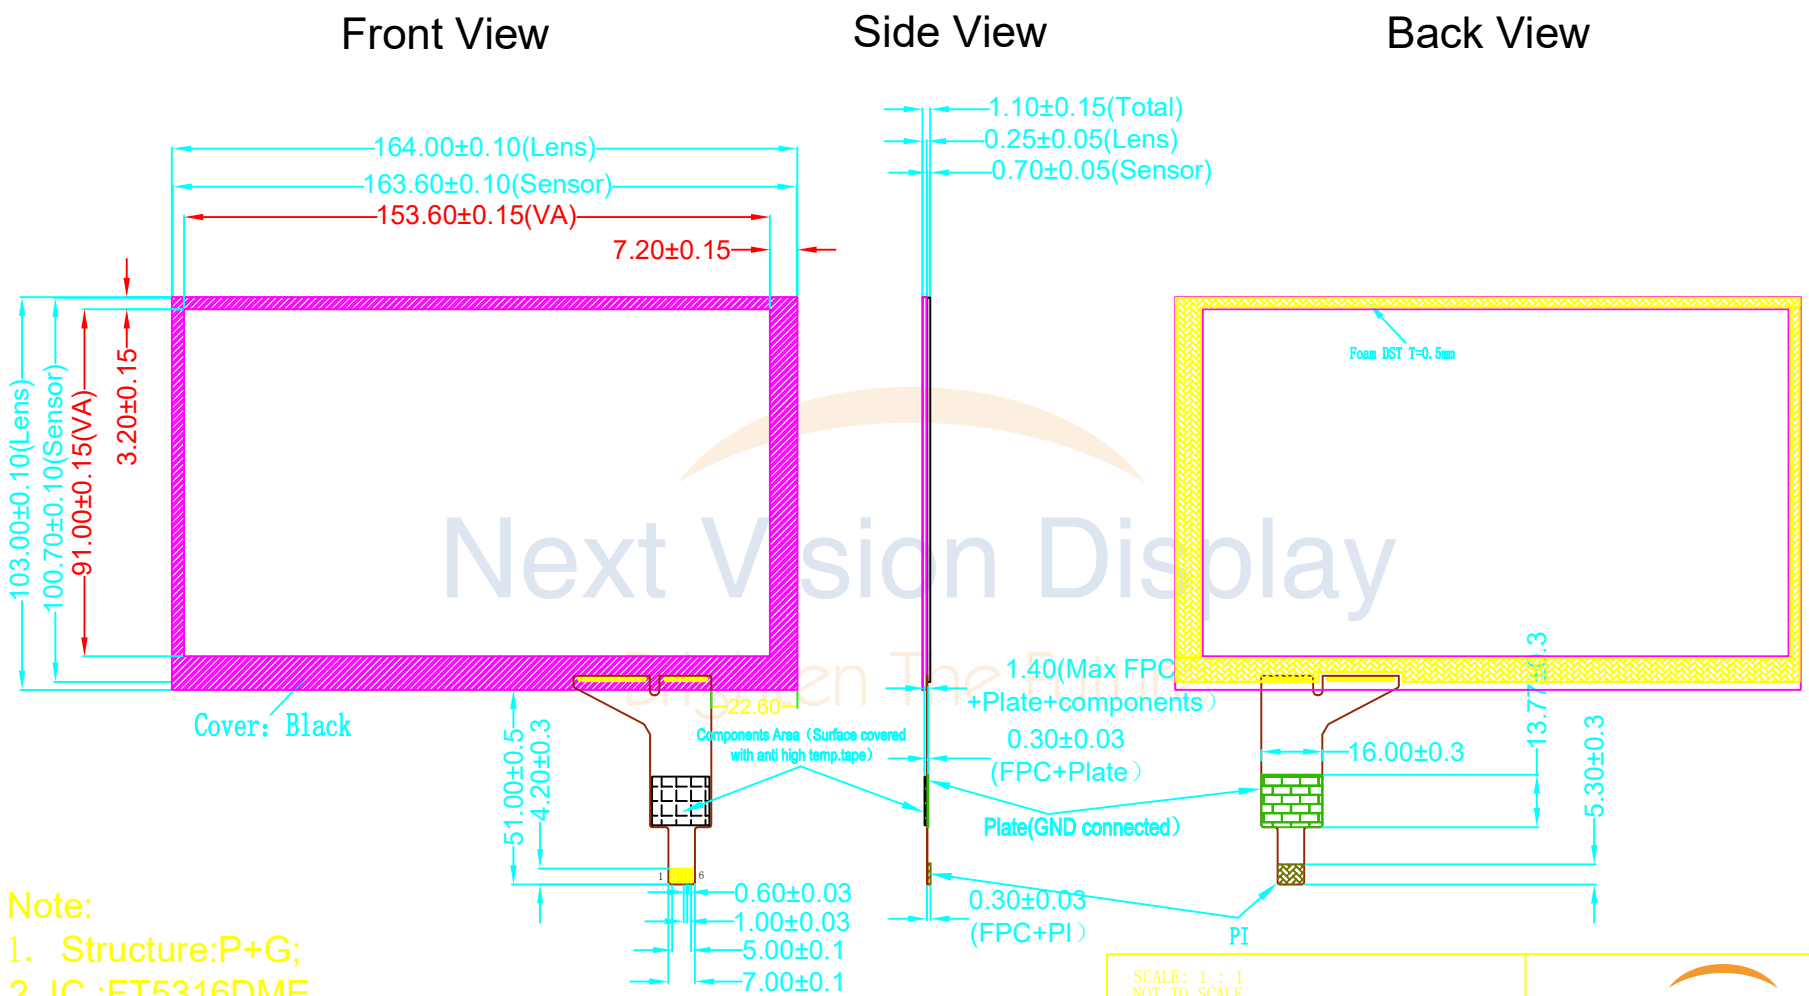

Note:

1. Structure:P+G;
2. IC :FT5316DME
3. Transparence rate:80%(min)
4. Unmarked tolerance:±0.1
5. Working Temp.:-10-60°,storage temp.：-20-70°；
6. BHS-001 compliance.

PIN	Interface
1	VDD
2	SCL
3	SDA
4	GND
5	INT
6	RST

SCALE: 1 : 1
NOT TO SCALE

PAGE: 1 OF 1

GENERAL TOL. 0.20mm

UNITS MM

APPROVALS | DATE

APP:

CHK:

DWN: FengWei 2016-10-25

Next Vision Display
Brighten The Future

MODEL NUMBER :
NT070-C001ME

DATE: 2016-10-25