SPECIFICATIONS

CUSTOMER	:	
SAMPLE CODE	:	SH800480T032-ZHC
MASS PRODUCTION CODE	:	PH800480T032-ZHC
SAMPLE VERSION	:	01
SPECIFICATIONS EDITION	:	002
DRAWING NO. (Ver.)	:	LMD-PH800480T032-ZHC (Ver.002)
PACKAGING NO. (Ver.)	:	PKG-PH800480T032-ZHC (Ver.001)

Customer Approved

Date:

Approved	Checked	Designer
廖志豪 Rex Liao	陳宗淇 Howard Chen	張慶源 Yuan Chang

POWERTIP
2024.01.10
TW RD APR

□ Preliminary specification for design input

■ Specification for sample approval

POWERTIP TECH. CORP.

Represented by:

FIRST Components s.r.l.
www.first-components.com
technical@first-components.com
+39 0332 1888005

SPECIFICATIONS

Features

Item	Standard Value
Display Resolution	800 *3 (RGB) * 480 Dots
LCD Type	IPS, Normally Black, Transmissive type
Screen size(inch)	7 inch
Color configuration	R.G.B. Vertical Stripe
Weight	252.6g
Interface	Parallel RGB (Data), SPI (Configuration)
Driver IC	Himax---HX8249-A02 Himax---HX8678-C
ROHS	THIS PRODUCT CONFORMS THE ROHS OF PTC

Mechanical Specifications

Item	Standard Value	Unit
Outline Dimension	189.4 (W) * 128.44 (L) * 7.6 (H)	mm

LCD panel

Item	Standard Value	Unit
View Area	153.40 (W) * 92.44 (L)	mm
Active Area	152.40 (W) * 91.44 (L)	mm

Note: For detailed information please refer to LCM drawing.

first components

Absolute Maximum Ratings

Module

Item	Symbol	Condition	Min.	Max.	Unit	Remark
Power Supply for TFT Panel	V_{DD}	GND=0V	-0.3	3.96	V	-
Power Supply for Backlight Unit	V_{CC}	GND=0V	-0.3	+20.0	V	
Operating Temperature	T_{OP}	-	-20	+70	°C	
Storage Temperature	T_{ST}	-	-30	+80	°C	

The absolute maximum rating values of this product are not allowed to be exceeded at any time. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

Note 1: Ts is the temperature of panel's surface

Note 2: Ta is the ambient temperature of samples

DC Electrical Characteristics

Module

GND = 0V, Ta = 25°C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Power Supply for TFT Panel	VDD	GND=0V	3.0	3.3	3.6	V
Power Supply for Backlight Unit	VCC	GND=0V	5	12	15	V
Input Voltage for TFT Panel	V_{IH}	GND=0V	0.7VDD	-	VDD	V
	V_{IL}	GND=0V	0	-	0.3VDD	
Supply Current for TFT Panel(RMS)	IDD	IDD@VDD=3.3V	-	30	45	mA
Peak Supply Current for TFT Panel	IDD	Full screen white	-	-	450	mA
Supply Current for Backlight Unit	ICC	ICC@VCC=5V	-	0.8	1.2	A
Supply Current for Backlight Unit	ICC	ICC@VCC=12V	-	0.3	0.45	
Input Voltage for PWM Signal	VPH	GND=0V	1.2	-	-	V
	VPL	GND=0V	-	-	0.4	V
Dimming Clock Rate	fP	GND=0V	0.1	-	8	KHz

Optical Characteristics

VDD=3.3V, Ta=25°C

Item	Symbol		Condition	Min.	Typ.	Max.	unit	
Response time	Tr+Tf		Ta = 25°C θX, θY = 0°	-	30	45	ms	Note 2
Viewing angle	Top	θY+	CR ≥ 10	-	80	-	Deg.	Note 4
	Bottom	θY-		-	80	-		
	Left	θX-		-	80	-		
	Right	θX+		-	80	-		
Contrast ratio		CR	Ta = 25°C θX , θY = 0°	650	800	-		Note 3
Color of CIE Coordinate (With B/L)	White	X		0.25	0.30	0.35	-	Note1
		Y		0.29	0.34	0.39		
	Red	X		0.60	0.65	0.70		
		Y		0.30	0.35	0.40		
	Green	X		0.26	0.31	0.36		
		Y		0.59	0.64	0.69		
	Blue	X		0.08	0.13	0.18		
		Y		0.01	0.06	0.11		
Average Brightness Pattern=white display (With LCD)*1	IF		VCC=12.0V PWM="High" (Duty=100%)	650	800	-	cd/m^2	Note1
Uniformity (With LCD)*2	△B		VCC=12.0V PWM="High" (Duty=100%)	70	-	-	%	Note1

Backlight Characteristics

Maximum Ratings


Item	Symbol	Min.	Max.	Unit	Remark
LED Forward Current	I_F	-	600	mA	Per
LED Reverse Voltage	V_R	-	1.2	V	

Electrical / Optical Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
LED Voltage	V_L	14.9	16.6	19.1	V	Note1
LED Current	I_L	-	210	-	mA	-
LED life time	-	50,000	-	-	H_r	Note2

Note 1: The LED Supply Voltage is defined by the number of LED at Ta=25℃ and I_L =210 mA

Note 2: The “LED life time” is defined as the module brightness decrease to 50% original brightness at Ta=25℃ and I_L =210 mA. The LED life time could be decreased if operating I_L is larger than 210mA

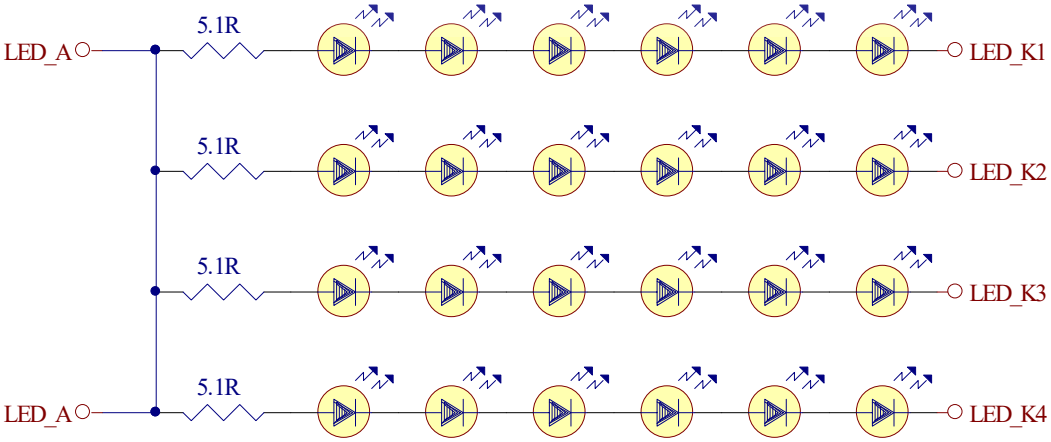

Touch Panel Characteristics

Features

Item	Standard Value
Touch Panel Size	7”
Touch type	Projective capacitive touch panel
Input Method	Finger or Conductive Pen
Support Operation	5 Points touch
Output Interface	I²C
IC	FT5426

I²C Address

Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
0	1	1	1	0	0	0	**R/W**

Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Max.	unit
Operating Temperature	T_{OP}	-	-20	+70	°C
Storage Temperature	T_{ST}	-	-30	+80	°C

DC Electrical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	unit
Power Supply Voltage	TPVDD	-	2.8	3.3	3.6	V

Optical Characteristics

Item	Standard Value	unit
Total light transmittance	85% or more	-
Haze	3% or less	-

Interface Pin Description

TFT LCM Interface

Pin#	Name	Description
1	GND	Power ground.
2	VDD	Power for Digital Circuit.
3	VDD	Power for Digital Circuit.
4	VCC	Power For LED backlight.
5	VCC	Power For LED backlight.
6	PWM	Shutdown & Dimming control input for backlight. Do not allow this pin to float. “Hi” =100%, “Low” = 0%.
7	GND	Power ground.
8	R0	Red Data.
9	R1	Red Data.
10	R2	Red Data.
11	R3	Red Data.
12	GND	Power ground.
13	R4	Red Data.
14	R5	Red Data.
15	R6	Red Data.
16	R7	Red Data.
17	GND	Power ground.
18	G0	Green Data.
19	G1	Green Data.
20	G2	Green Data.
21	G3	Green Data.
22	GND	Power ground.
23	G4	Green Data.
24	G5	Green Data.
25	G6	Green Data.
26	G7	Green Data.
27	GND	Power ground.
28	B0	Blue Data.
29	B1	Blue Data.

first components

Pin#	Name	Description
30	B2	Blue Data.
31	B3	Blue Data.
32	GND	Power ground.
33	B4	Blue Data.
34	B5	Blue Data.
35	B6	Blue Data.
36	B7	Blue Data.
37	GND	Power ground.
38	HS	Line synchronization signal. Horizontal Sync Input.
39	VS	Frame synchronization signal. Vertical Sync Input.
40	GND	Power ground.
41	DE	Data Enable
42	GND	Power ground.
43	DCLK	Sample clock. Data will be latched at the falling edge of DCLK.
44	GND	Power ground.
45	CS / ID1	Serial communication chip selection/ID[4:1]These pins select LCM type. See NOTE1
46	SDIN / ID2	Serial communication data/ ID[4:1]These pins select LCM type. See NOTE1
47	SCK / ID3	Serial communication clock/ ID[4:1]These pins select LCM type. See NOTE1
48	DISPLAY CONTROL / ID4	Display Enable(Hi Active)./ ID[4:1]These pins select LCM type. See NOTE1
49	/RESET	Global Reset (Low Active).
50	GND	Power ground.

Note1:

ID Pins Definition:


	PIN 45 ID1	PIN 46 ID2	PIN 47 ID3	PIN 48 ID3
3.5” Module	X	0	0	X
4.3” Module	X	1	0	X
5.0” Module	X	0	1	X
7.0” Module	X	1	1	X

1. Resistor = 10k ohm
2. “X” = No use

Touch Panel interface

Pin#	Name	Description
1	GND	Ground.
2	TPVDD	Power Supply Voltage (3.3V)
3	SCL	I2C Clock
4	SDA	I2C Data
5	INT	Active Low
6	RESET	Active low global reset signal input.

first FC components

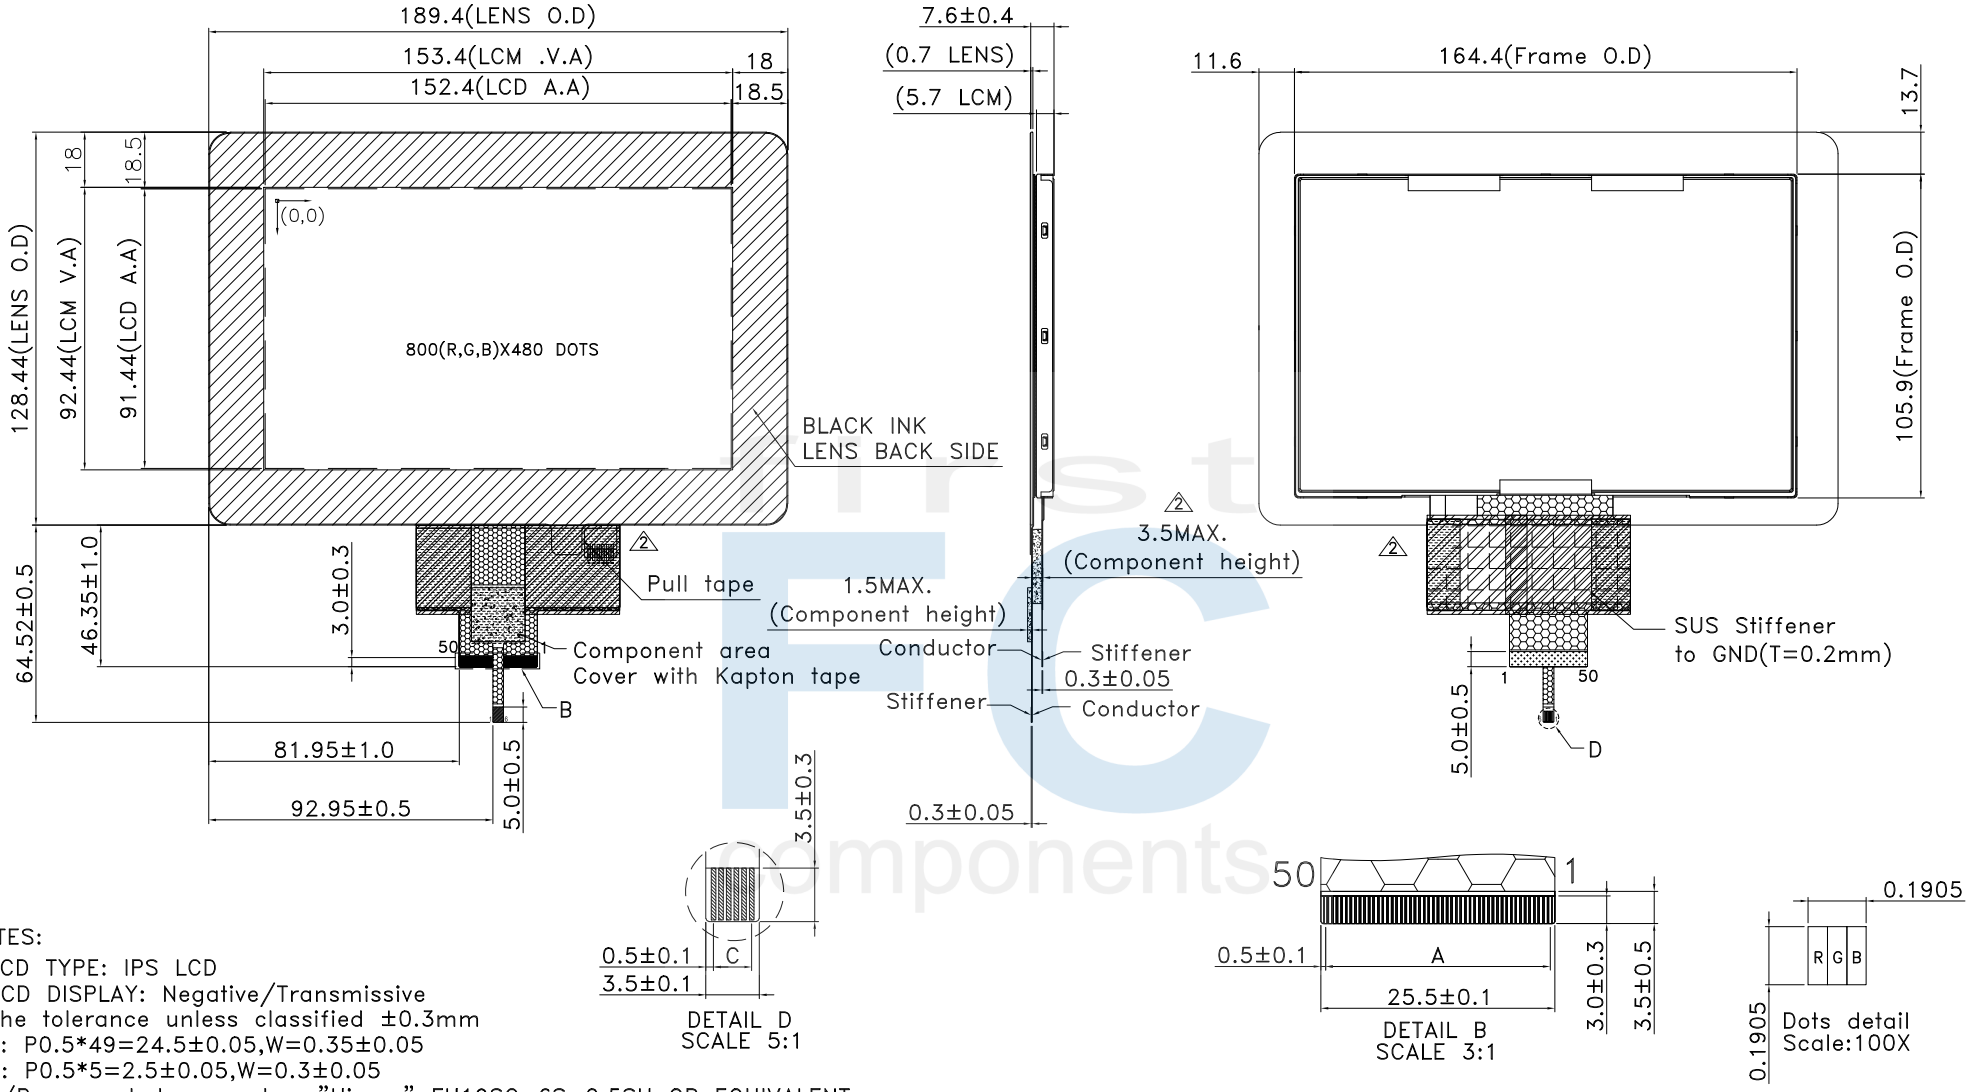

NOTES:

1.LCD TYPE: IPS LCD
2.LCD DISPLAY: Negative/Transmissive
3.The tolerance unless classified ±0.3mm
4.A: P0.5*49=24.5±0.05,W=0.35±0.05
C: P0.5*5=2.5±0.05,W=0.3±0.05
5.T/P suggested connector: "Hirose" FH19SC-6S-0.5SH OR EQUIVALENT
6.TFT suggested connector: "CviLux" CF31501D0R2-05-NH OR EQUIVALENT 7. Kapton tape Component area EMI film Aluminum Foil

REV	REV BY	REVISER	DATE
007			
006			
005			
004			
003			
002	Modify Drawing & Component height	Tina	2023/12/06
001	NEW DRAWING	Lauren	2019/12/16

PART NO: PH800480T032-ZHC
DRAWING NAME : LMD-PH800480T032-ZHC
TITLE: LCD MODULE DRAWING

久正光電股份有限公司
POWERTIP TECHNOLOGY CORPORATION

Design	Lauren Chien	(3)	Surface		
Check	Clare Chen	Unit	MM	Material	
Approve	Rex Liao	Scale	1:1	Thickness	
		Page	1/1	Quantity	

Length(Min) (mm) \ Tolerance \ Precision	Precision Level
1 ~ 4	-
4 ~ 16	-
16 ~ 63	-
63 ~ 250	-
250 ~ 1000	-