
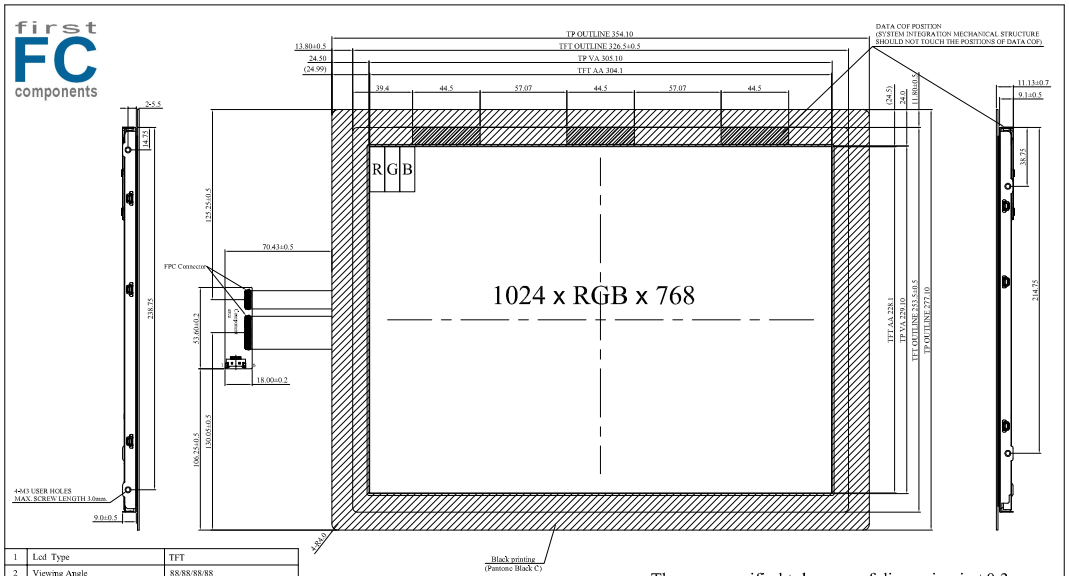


1	Lcd Type	TFT
2	Viewing Angle	88/88/88/88
3	Polarizer Mode	Transmissive
4	Screen size	15.0(diagonal)
5	Display format	1024 x RGB x 768
6	Operating Temperature	-20°C ~70°C
7	Storage Temperature	-30°C ~80°C
8	Active area	304.1(H) x 228.1(V)
9	Pixel pitch	0.297(H) x 0.297(V)
10	Color arrangement	RGB-STRIPE
11	Brightness	200nm. 250typ. cd/m2
12	CTP IC	EXC3160 or equivalent

The non-specified tolerance of dimension is ±0.3 mm .

SCALE: 1/1	UNIT: mm	華凌光電股份有限公司 WINSTAR DISPLAY CO.
REV: 0	PAGE: 1/2	
APPROVED	梁榮智 03/22/18'	MODEL WF150-1024768AL#0P8-FC
CHECKED	曾詠琮 03/22/18'	TITLE TFT MODULE
DRAWN	李 楠 03/21/18'	DWG NO. T-070322

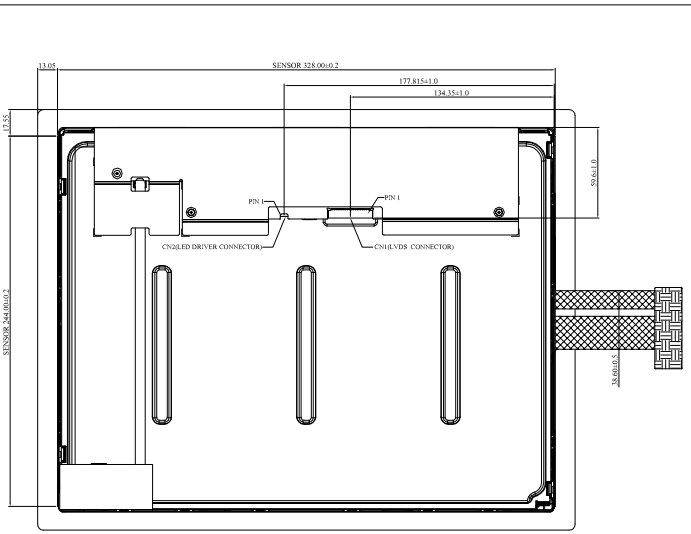

CN2

PIN NO	SYMBOL
1	Vi
2	VGND
3	EN
4	Dimming
5	NC

CTP

PIN NO	SYMBOL
1	NC
2	NC
3	D+
4	D-
5	VCC
6	GND

CN1

PIN NO	SYMBOL
1	VCC
2	VCC
3	NC
4	LR/UD
5	RX0-
6	RX0+
7	GND
8	RX1-
9	RX1+
10	NC
11	RX2-
12	RX2+
13	GND
14	RXCLK-
15	RXCLK+
16	GND
17	RX3-
18	RX3+
19	NC
20	SEL68

The non-specified tolerance of dimension is ±0.3 mm .

SCALE: 1/1	UNIT: mm	華凌光電股份有限公司 WINSTAR DISPLAY CO.
REV: 0	PAGE: 2/2	
APPROVED	梁榮智 03/22/18'	MODEL WF150-1024768AL#0P8-FC
CHECKED	曾詠琮 03/22/18'	TITLE TFT MODULE
DRAWN	李 楠 03/21/18'	DWG NO. T-070322

Represented by:

FIRST Components srl Via Cavour 69, 21020 Buguggiate (VA)

T. +39 0332 1888005 web: www.first-components.com