

User Guide Evaluation Kit for TFT 1.8" MCU interface w & w/o RTP
WWTFTDEMO18F-00#

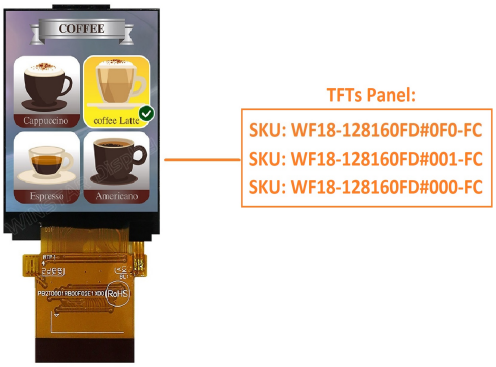

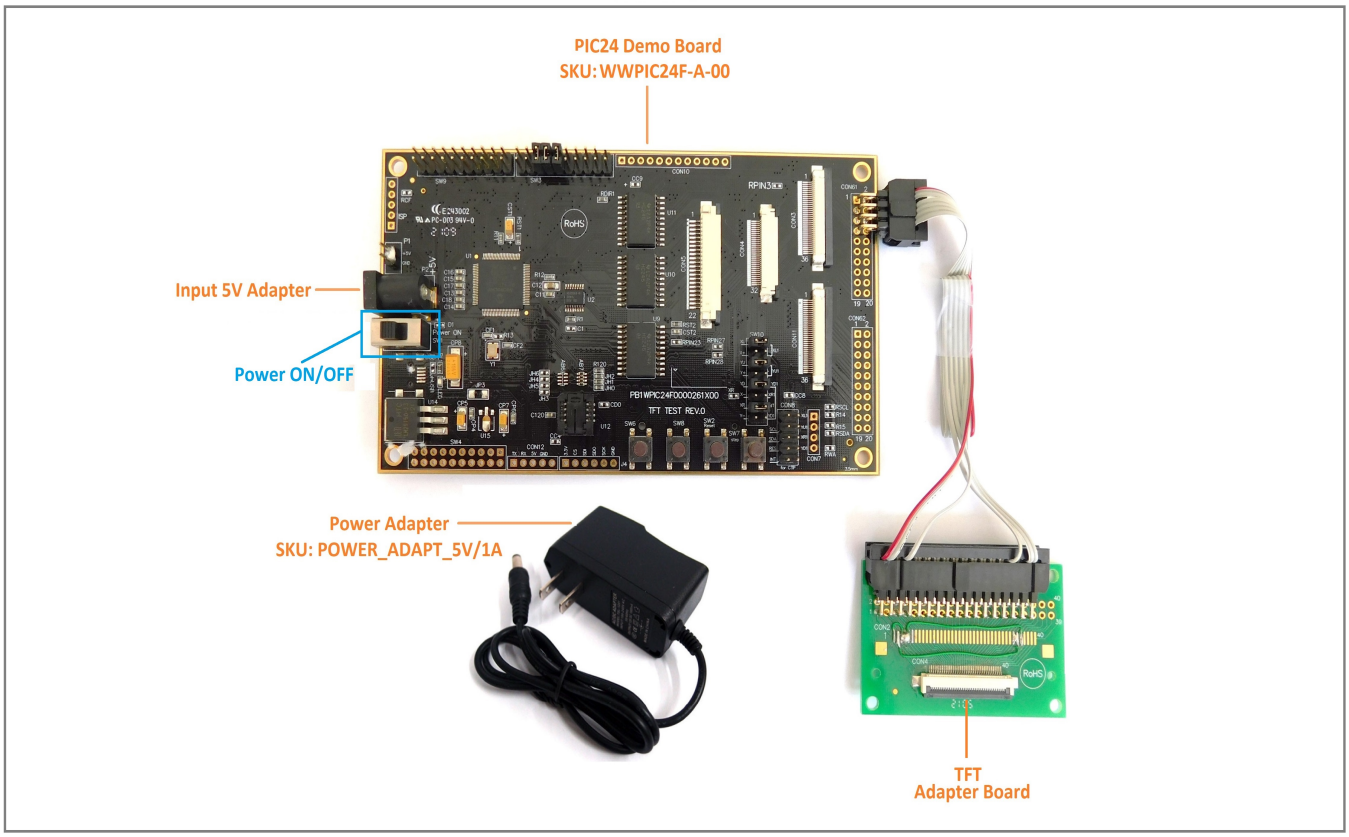

Kit Assembling Guide

1) Connect the TFT display module to the TFT Adapter Board via FPC Cable 40 pin;
2) Insert 5V/1A Power Adapter (POWER_ADAPT_5V/1A) to the PIC24 Demo Board (WWPIC24F-A-00#) through power jack connector;
3) Power ON through Power ON/OFF switch.