

User Guide Evaluation Kit for TFT 2.8" MCU interface High brightness

WWTFTDEMO28J-02

TFT panel

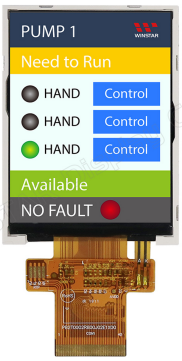

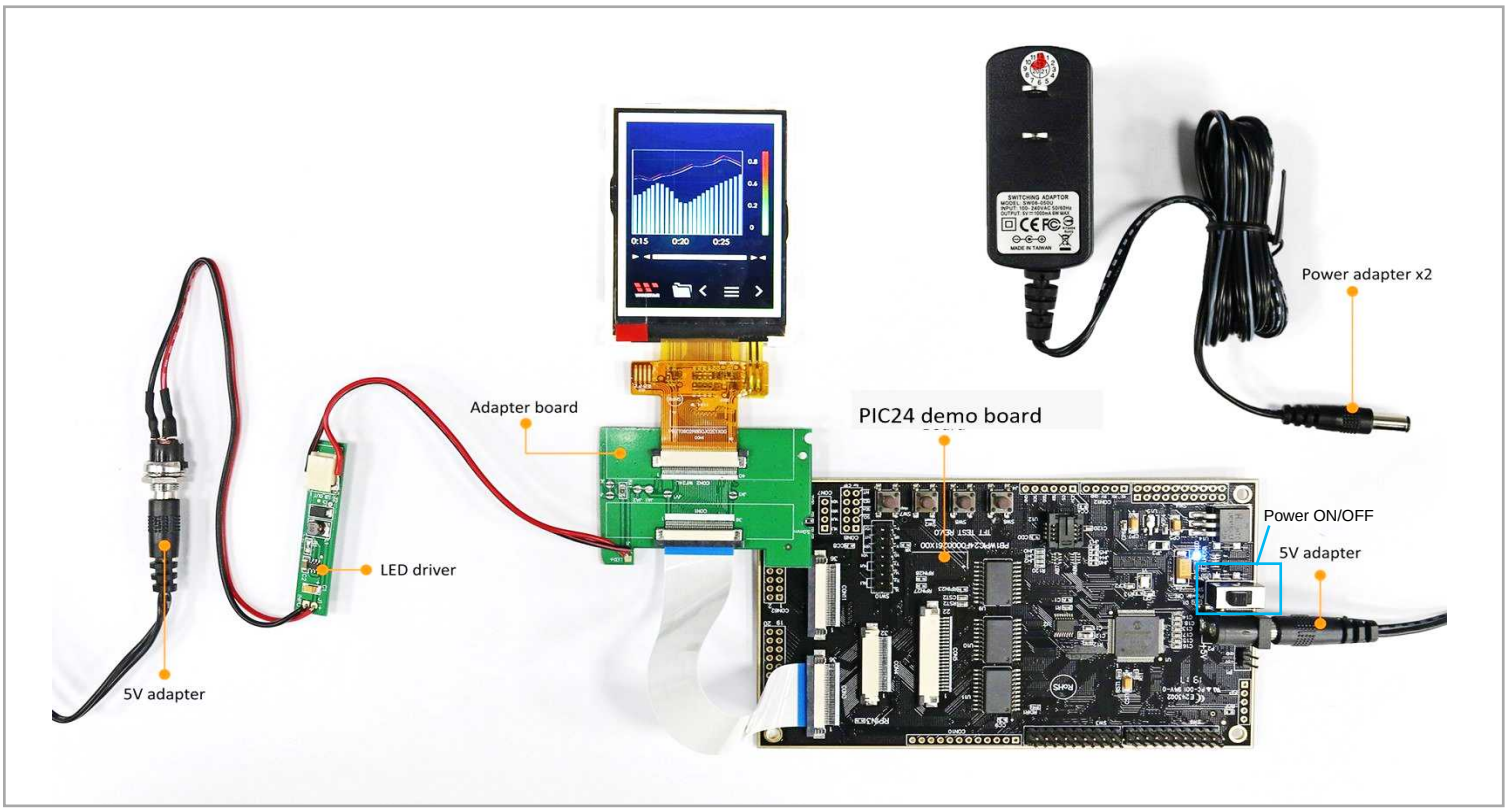

Kit Assembling Guide

1) Connect the TFT display module to the TFT Adaptor board via FPC Cable
2) Insert 5V power adapter to the PIC24 demo board (WWPIC24F-A-00#) through power jack connector
3) Insert 5V power adapter to the LED driver
4) Power ONthrough Power ON/OFF switch