
User Guide Evaluation Kit for TFT 3.5 MCU (RGB/Parallel/SPI) w & w/o RTP

WWTFTDEMO35R-02#

TFT panel



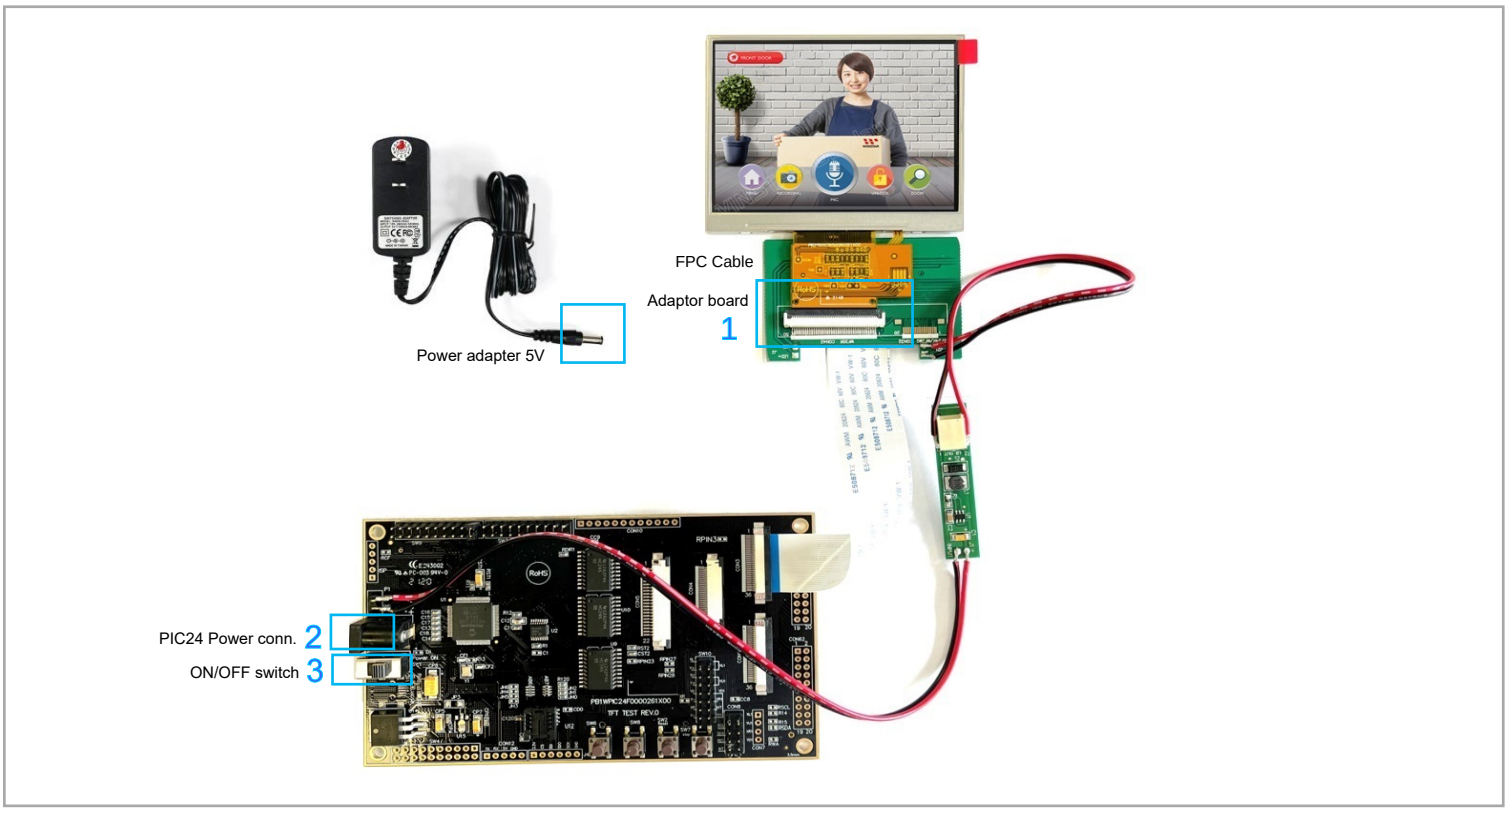

Power ON/OFF

Kit Assembling Guide

1) Connect the TFT display module to the TFT Adaptor board via FPC Cable (bottom contact)
2) Insert 5V power adapter to the PIC24 demo board (WWPIC24F-A-00#) through power jack connector
3) Power ON through Power ON/OFF switch