
User Guide Evaluation Kit for TFT 5" SPI interface, Resistive Touch

WWTFTDEMO50FSPI-02#

TFT panel



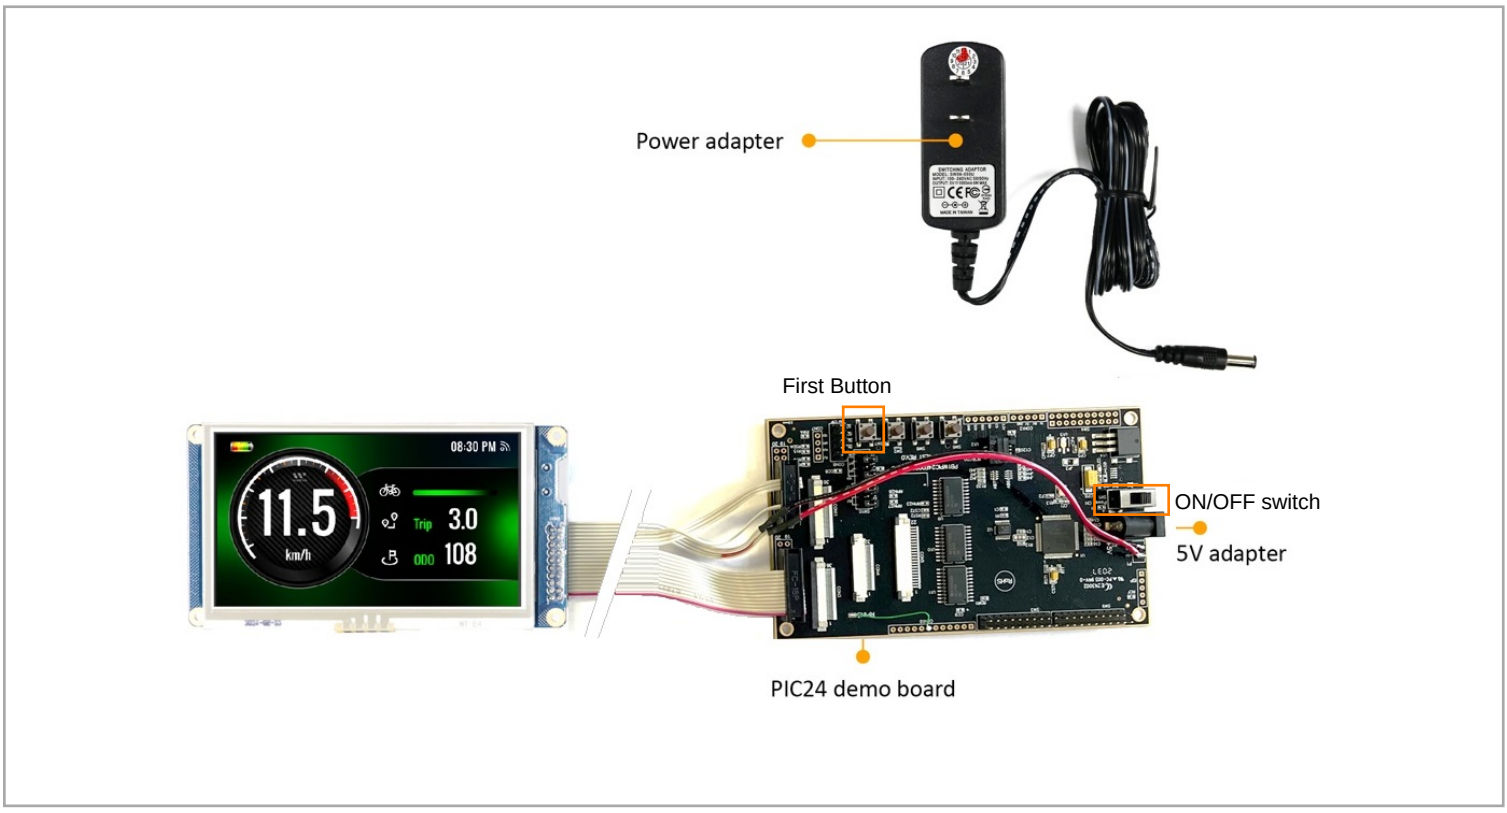

Kit Assembling & User Guide

1) Insert 5V 2A power adapter to the PIC24 demo board (WWPIC24F-A-00#) through power jack connector
2) Power ON through Power ON/OFF switch
3) Test the touch function by clicking on the three black circles
4) Press the First button for 2 seconds (colors image appears) + Press again the First button for 2 seconds (white edges image appears) + Press again the First button for 2 seconds ('loading BMP data' + first landscape photo)
5) Press again the First button for 1 second for the images change (grey scale, colors scale, brightness…)