



The drawing contained herein is the exclusive property of WiseChip. It is not allowed to copy, reproduce and or disclose in any formats without permission of WiseChip.

Item	Date	Remark
A	20121226	Original Drawing
B	20141113	Modify Pin Definition

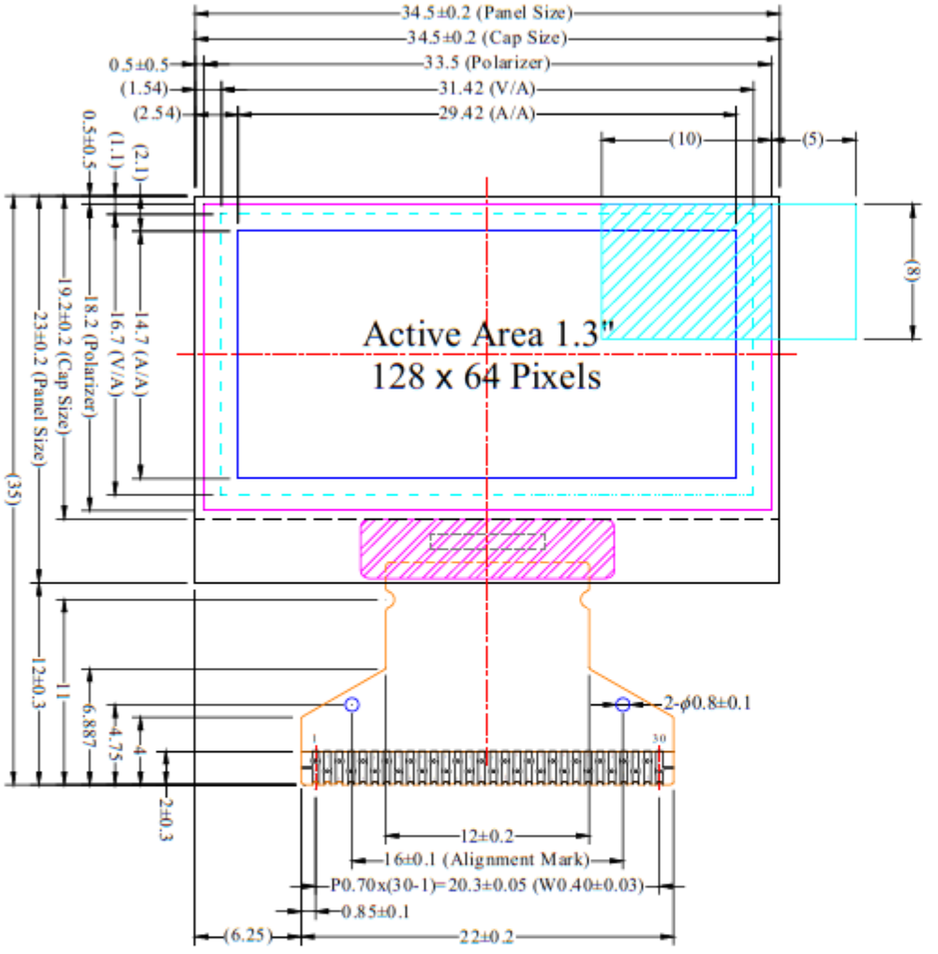

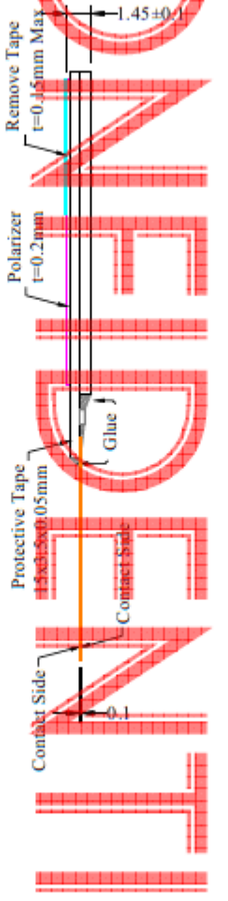

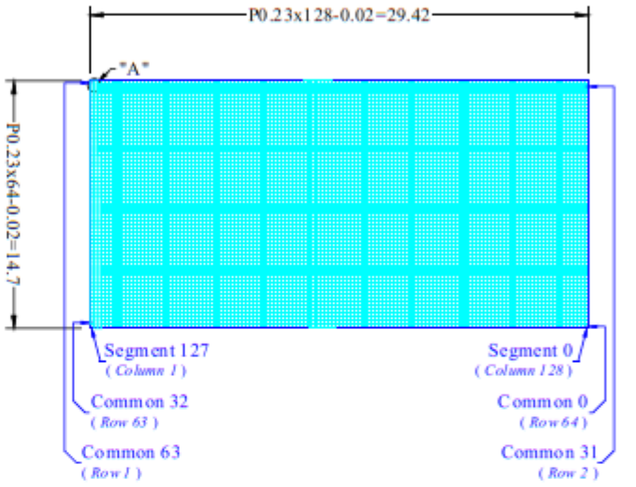



Detail "A"
Scale (10:1)

Pin	Symbol
1	N.C. (GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VDDB
7	N.C.
8	VSS
9	VDD
10	IM0
11	IM1
12	IM2
13	CS#
14	RES#
15	D/C#
16	R/W#
17	ERD#
18	D0
19	D1
20	D2
21	D3
22	D4
23	D5
24	D6
25	D7
26	IREF
27	VCOMH
28	VCC
29	VLSS
30	N.C. (GND)

Notes:

1. Color: Light Blue
2. Driver IC: SSD1306
3. FPC Number: UT-0206-P05
4. Interface:
   8-bit 68XX/80XX Parallel, 3-/4-wire SPI, I2C
5. General Tolerance: ±0.30
6. The total thickness (1.55 Max) is without polarizer protective film & remove tape.
   The actual assembled total thickness with above materials should be 1.80 Max.

CONFIDENTIAL

Customer Approval Signature	WiseChip Semiconductor Inc.					Drawing Number	Rev.
						DMX2864SDGFBY	B
	Unless Otherwise Specified		Title	UG-2864KLBLG01 Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, COG Package		Material	
	Unit	mm				Soda Lime / Polyimide	
	General Projection						
	Tolerance		Drawn	E.E.	Panel / E.	P.M.	
	Dimension	±0.3	By	Gary Lin	Ting-Kuo Hu	Gary Lin	Cherry Lin
	Angle	±1	Date	20141113	20141113	20141113	20141113

Scale	Sheet	Size
1:1	1 of 1	A3