



Mechanical Drawing

Item	Date	Remark
A	20070920	Original Drawing
B	20091214	Change Protective Tape Material

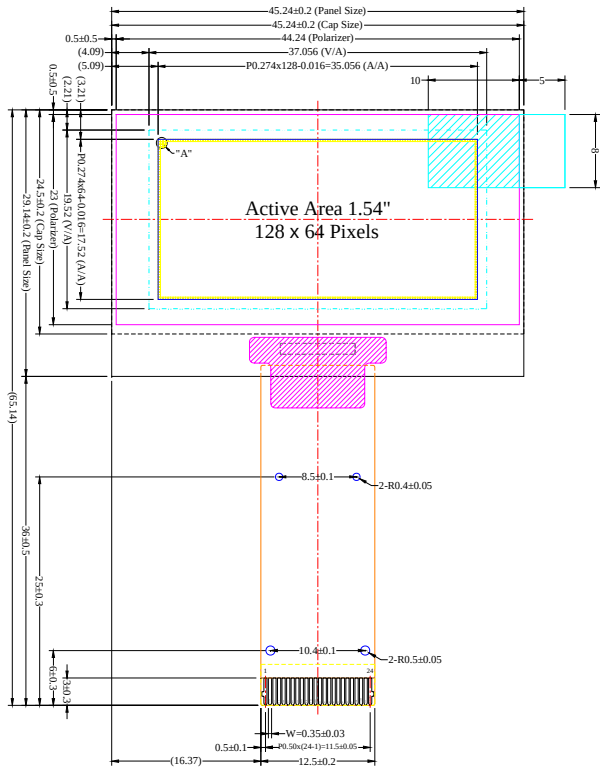

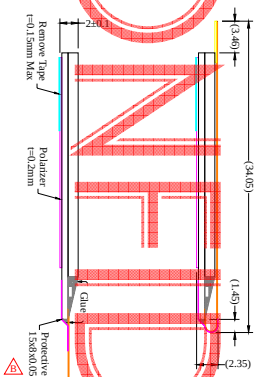





Pin	Symbol
1	N.C. (GND)
2	VLSS
3	VSS
4	N.C.
5	VDD
6	BS1
7	BS2
8	CS#
9	RES#
10	D/C#
11	R/W#
12	E/RD#
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IREF
22	VCOMH
23	VCC
24	N.C. (GND)

Notes:

1. Color: Yellow
2. Driver IC: SSD1305
3. FPC Number: UT-0205-P05
4. Interface:
   8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
5. General Tolerance: ±0.30
6. The total thickness (2.10 Max) is without polarizer protective film & remove tape.
   The actual assembled total thickness with above materials should be 2.35 Max.

Customer Approval Signature

WiseChip Semiconductor Inc.

Unless Otherwise Specified		Title	UG-2864ASYCG01 Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, COG Package				Drawing Number	Rev.
Unit	mm						DMX2864CNGF29	B
General Roughness							Material	
Tolerance			Drawn	E.E.	Panel / E.	P.M.	Soda Lime / Polyimide	
Dimension	±0.3	By	Humphrey Lin	Ting-Kuo Hu	Ivy Lo	Tiffany Hsu	Scale	Sheet / Size
Angle	±1	Date	20091214	20091214	20091214	20091214	1:1	1 of 1 / A3

CONFIDENTIAL

The drawing contained herein is the exclusive property of WiseChip. It is not allowed to copy, reproduce and or disclose in any formats without permission of WiseChip.

first FC components