



The drawing contained herein is the exclusive property of WiseChip. It is not allowed to copy, reproduce and or disclose in any formats without permission of WiseChip.

Item	Date	Remark
A	20071112	Original Drawing
B	20071122	Shrink Panel Size
C	20071126	Modify Active Area Position
D	20091214	Change Protective Tape Material

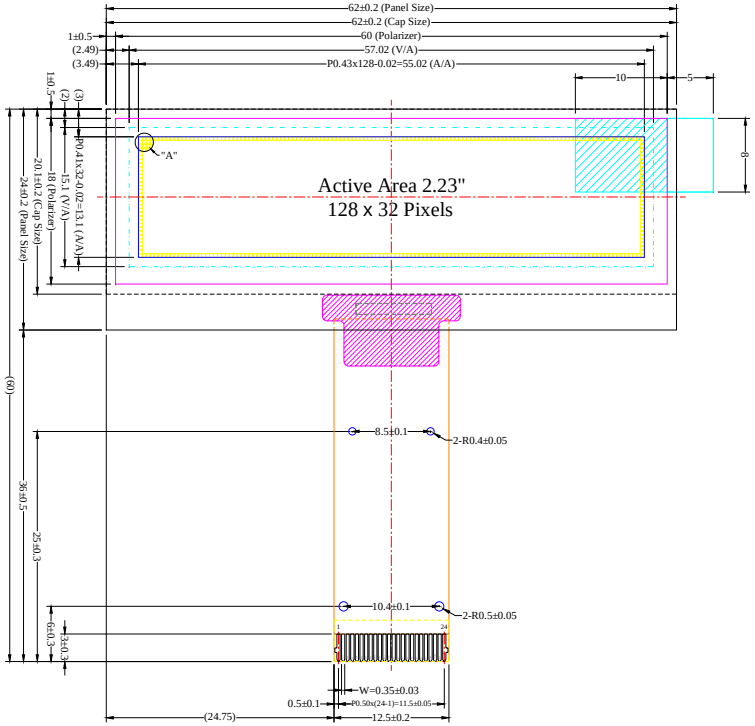

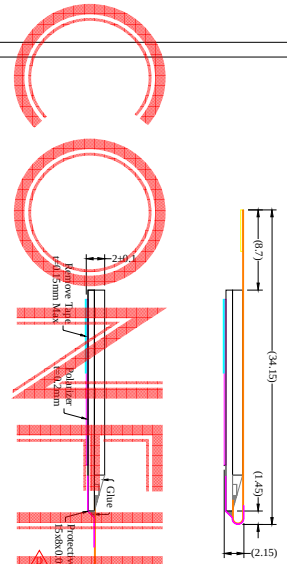





Pin	Symbol
1	N.C. (GND)
2	VLSS
3	VSS
4	N.C.
5	VDD
6	BS1
7	BS2
8	CS#
9	RES#
10	D/C#
11	R/W#
12	E/RD#
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IREF
22	VCOMH
23	VCC
24	N.C. (GND)

Notes:

1. Color: Yellow
2. Driver IC: SSD1305
3. FPC Number: UT-0205-P05
4. Interface:
   8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
5. General Tolerance: ±0.30
6. The total thickness (2.10 Max) is without polarizer protective film & remove tape.
   The actual assembled total thickness with above materials should be 2.35 Max.

Customer Approval Signature	WiseChip Semiconductor Inc.					Drawing Number	Rev.
						DMX2832CNGF14	D
	Unless Otherwise Specified		Title	UG-2832ASYCG01 Folding Type OEL Display Module Pixel Number: 128 x 32, Monochrome, COG Package		Material	
	Unit	mm				Soda Lime / Polyimide	
	General Roughness						
	Tolerance			Drawn	E.E.	Panel / E.	P.M.
	Dimension	±0.3	By	Humphrey Lin	Ting-Kuo Hu	Ivy Lo	Tiffany Hsu
	Angle	±1	Date	20091214	20091214	20091214	20091214

Scale	Sheet	Size
1:1	1 of 1	A3