Next Vision Display

Brighten The Future

SPECIFICATION

CUSTOMER : _____

MODULE NO.: NG14432N001WS

APPROVED BY:	**PCB VERSION:** **DATA:**

Next Vision Display
Brighten The Future

www.nextvisiondisplay.com

Specification

Item	Dimension	Unit
Number of dots	144 x 32	—
Module dimension	80.0 x 36.0 x 13.2 (MAX)	mm
View area	66.0 x 16.0	mm
Active area	60.44 x 13.4	mm
Dot size	0.38 x 0.38	mm
Dot pitch	0.42 x 0.42	mm
LCD type	STN Negative, Blue Transmissive	
Duty	1/32	
View direction	6 o'clock	
Backlight Type	LED, White	
IC	ST7920	

Next Vision Display
Brighten The Future

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	T_{OP}	-20	—	+70	℃
Storage Temperature	T_{ST}	-30	—	+80	℃
Input Voltage	V_{IN}	-0.3	—	V_{DD}+0.3	V
Supply Voltage For Logic	V_{DD}-V_{SS}	-0.3	—	5.5	V
Supply Voltage For LCD	V_O-V_{SS}	0	—	7.0	V

Polarizer de-coloration may occur at high temperture resulting in color background drift. High temperature /High humidity performance are guaranteed provided test cycle is according to the Relieability Test table at page 12.


Next Vision Display
Brighten The Future

Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For Logic	V_{DD}-V_{SS}	—	4.5	5.0	5.5	V
Supply Voltage For LCD * Note	V_0-V_{SS}	Ta=-20℃	—	—	5.5	V
		Ta=25℃	4.1	4.3	4.5	V
		Ta=+70℃	3.8	—	—	V
Input High Volt.	V_{IH}	—	0.7V_{DD}	—	V_{DD}	V
Input Low Volt.	V_{IL}	—	-0.3	—	0.6	V
Output High Volt.	V_{OH}	—	0.8 V_{DD}	—	V_{DD}	V
Output Low Volt.	V_{OL}	—	0	—	0.4	V
Supply Current	I_{DD}	V_{DD}=5.0V	2.0	2.5	3.5	mA

* Note: Please design the VOP adjustment circuit on customer's main board


Next Vision Display
Brighten The Future



Optical Characteristics


Item	Symbol	Condition	Min	Typ	Max	Unit
View Angle	θ	CR≧2	0	—	20	ϕ = 180°
	θ	CR≧2	0	—	40	ϕ = 0°
	θ	CR≧2	0	—	30	ϕ = 90°
	θ	CR≧2	0	—	30	ϕ = 270°
Contrast Ratio	CR	—	—	3	—	—
Response Time	T rise	—	—	150	200	ms
	T fall	—	—	150	200	ms

Definition of Operation Voltage (Vop)

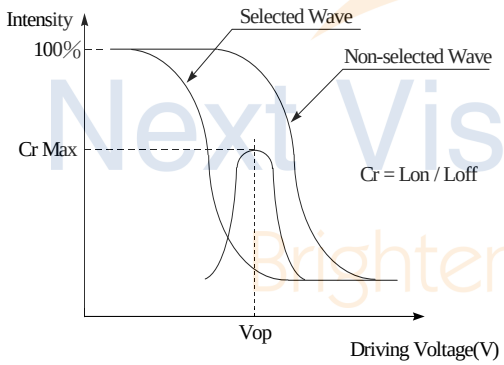

[positive type]

Definition of Response Time (Tr , Tf)

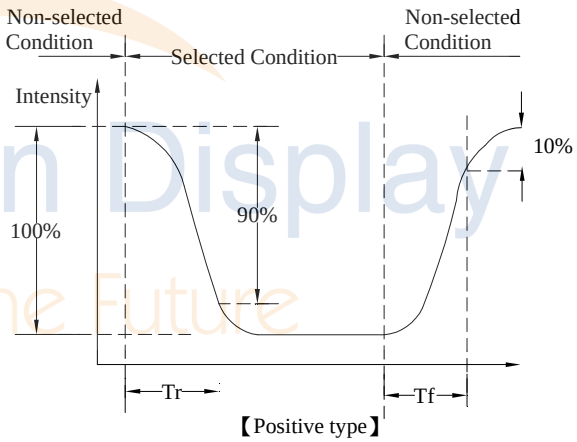


【Positive type】

Conditions :

Operating Voltage : Vop　　Viewing Angle(θ ， φ) : 0°， 0°

Frame Frequency : 64 HZ　　Driving Waveform : 1/N duty , 1/a bias

Definition of viewing angle(CR≧2)

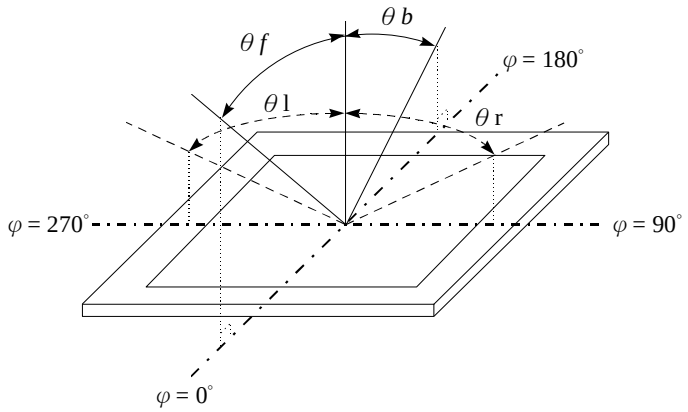


Next Vision Display
Brighten The Future


Interface Pin Function

Pin No.	Symbol	Level	Description
1	VSS	0V	GND
2	VDD	5.0V	Power Supply
3	Vo	—	Contrast adjustment
4	RS	H/L	H/L register select signal
5	R/W	H/L	H/L Read/Write signal
6	E	H/L	Enable signal
7	DB0	H/L	Data bus line
8	DB1	H/L	Data bus line
9	DB2	H/L	Data bus line
10	DB3	H/L	Data bus line
11	DB4	H/L	Data bus line
12	DB5	H/L	Data bus line
13	DB6	H/L	Data bus line
14	DB7	H/L	Data bus line
15	A	—	Power supply for B/L +
16	K	—	Power supply for B/L -

Next Vision Display
Brighten The Future

Contour Drawing & Block Diagram

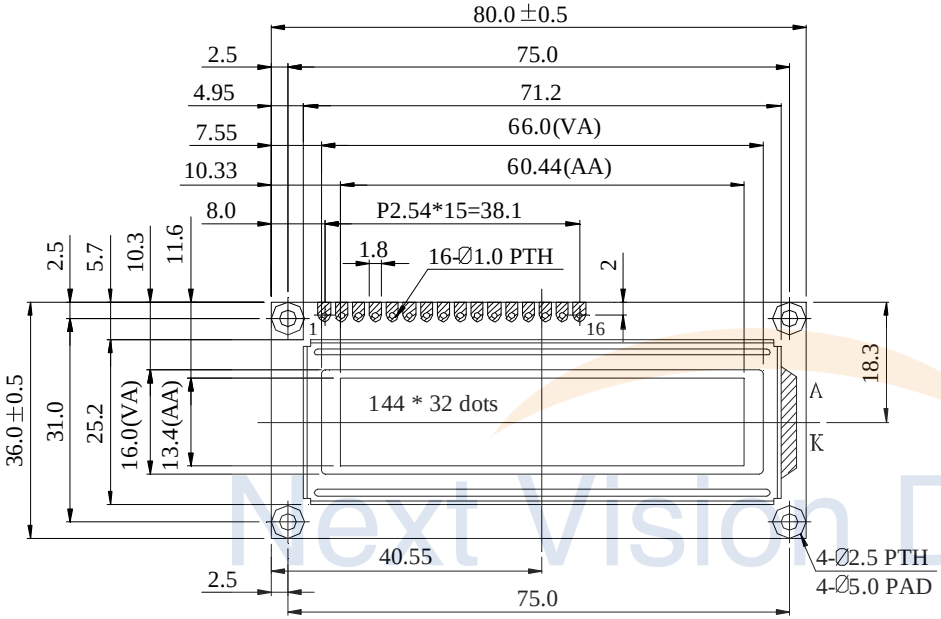


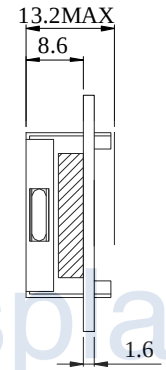

LED H/L B/L

PIN NO.	SYMBOL
1	Vss
2	Vdd
3	V0
4	RS
5	R/$\overline{W}$
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

The non-specified tolerance of dimension is ±0.3mm.



DOT SIZE
SCALE 10/1

Next Vision Display
Brighten The Future