SPECIFICATION

CUSTOMER : _____

MODULE NO.: WH2004A1-TMI-EWV#

General Specification

Item	Dimension	Unit
Number of Characters	20 characters x 4Lines	—
Module dimension	98.0 x 60.0 x 13.6(MAX)	mm
View area	77.0 x 25.2	mm
Active area	70.4 x 20.8	mm
Dot size	0.55 x 0.55	mm
Dot pitch	0.60 x 0.60	mm
Character size	2.95 x 4.75	mm
Character pitch	3.55 x 5.35	mm
LCD type	STN Negative, Blue Transmissive (In LCD production, It will occur slightly color difference. We can only guarantee the same color in the same batch.)	
Duty	1/16	
View direction	6 o'clock	
Backlight Type	LED ,White	


Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	T_{OP}	-20	—	+70	℃
Storage Temperature	T_{ST}	-30	—	+80	℃
Input Voltage	V_{IN}	-0.3	—	V_{DD}+0.3	V
Supply Voltage For Logic	V_{DD}-V_{SS}	-0.3	—	5.5	V
Supply Voltage For LCD	V_{DD}-V_0	V_{SS} -0.3	—	V_{SS} +7.0	V

Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For Logic	V_{DD}-V_{SS}	—	3.0	3.3	3.6	V
Supply Voltage For LCD *Note	V_{DD}-V_0	Ta=-20℃	—	—	5.3	V
		Ta=25℃	4.4	4.5	4.6	V
		Ta=70℃	3.8	—	—	V
Input High Volt.	V_{IH}	—	0.7 V_{DD}	—	V_{DD}	V
Input Low Volt.	V_{IL}	—	-0.3	—	0.6	V
Output High Volt.	V_{OH}	—	0.75V_{DD}	—	—	V
Output Low Volt.	V_{OL}	—	—	—	0.2V_{DD}	V
Supply Current	I_{DD}	V_{DD}=3.3V	1.0	1.2	1.5	mA


* Note: Please design the VOP adjustment circuit on customer's main board

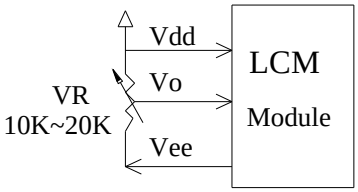


Interface Pin Function


Pin No.	Symbol	Level	Description
1	V_{SS}	0V	Ground
2	V_{DD}	3.3V	Supply Voltage for logic
3	VO	(Variable)	Operating voltage for LCD
4	RS	H/L	In bus mode, used as register selection input. When RS = “High”, Date register is selected. When RS = “Low”, Instruction register is selected.
5	NC	—	No connection
6	NC	—	No connection
7	NC	—	No connection
8	NC	—	No connection
9	NC	—	No connection
10	NC	—	No connection
11	NC	—	No connection
12	CSB	H/L	In 4-SPI serial mode, used as chip selection input. When CSB = “Low”, selected When CSB = “High”, not selected. (Low access enable)
13	SCLK	H/L	Serial clock input
14	SID	H/L	Serial data input
15	Vee	—	Negative Voltage Output
16	NC	—	No connection

Contour Drawing & Block Diagram

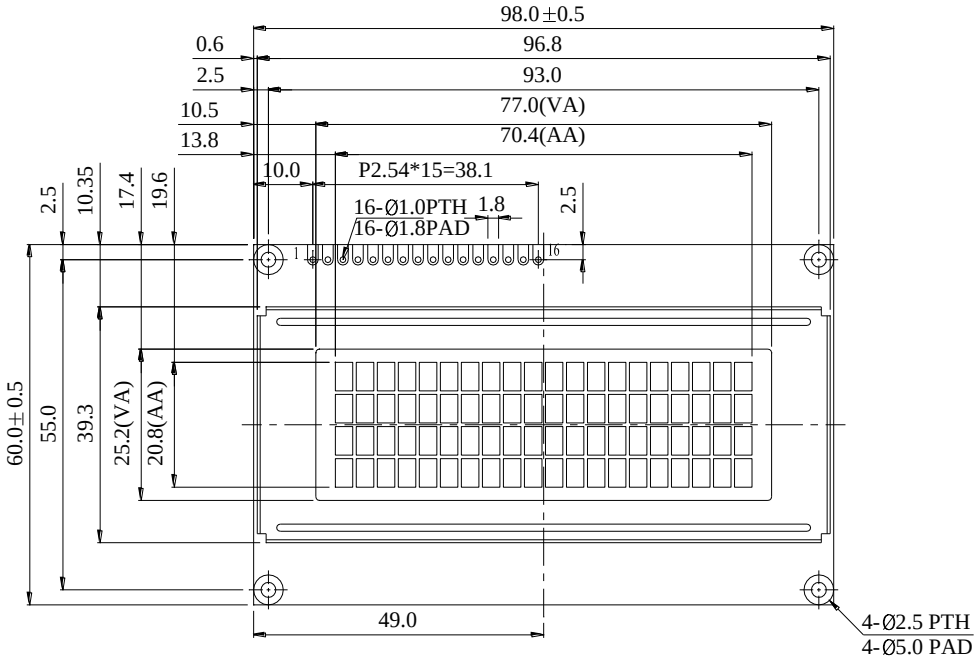

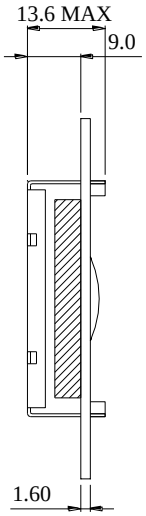

PIN NO.	SYMBOL
1	Vss
2	Vdd
3	Vo
4	RS
5	NC
6	NC
7	NC
8	NC
9	NC
10	NC
11	NC
12	CSB
13	SCLK
14	SID
15	Vee
16	NC

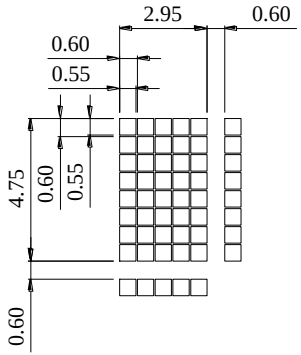

DOT SIZE
SCALE 5/1

The non-specified tolerance of dimension is ±0.3mm.