TFT DISPLAY SPECIFICATION



WINSTAR Display Co.,Ltd.

華凌光電股份有限公司

Represented by:

first FC components
FIRST Components s.r.l.
www.first-components.com
technical@first-components.com
+39 0332 1888005

SPECIFICATION

CUSTOMER : _____

MODULE NO.: WF0096-80160AD#0P0B-FC

APPROVED BY: **(FOR CUSTOMER USE ONLY)**	**PCB VERSION:** **DATA:**

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY
first FC components			
ISSUED DATE:	**2026/10/27**		

General Specifications

Item	Dimension	Unit
Size	0.96	inch
Dot Matrix	80 x RGB x 160(TFT)	dots
Module dimension	13.5(W) x 27.95(H) x 1.54(D)	mm
Active area	10.8 x 21.696	mm
Pixel pitch	0.135 x 0.1356	mm
LCD type	TFT, Normally black, Transmissive	
Viewing Angle	80/80/80/80	
Aspect Ratio	1:2	
TFT Drive IC	ST7735P	
TFT Interface	SPI Interface	
Backlight Type	LED,Normally White	
With /Without TP	Without TP	
Surface	Glare	

*Color tone slight changed by temperature and driving voltage.

first FC components

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	℃
Storage Temperature	TST	-30	—	+80	℃

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp. ≦ 60℃, 90% RH MAX. Temp.＞60℃, Absolute humidity shall be less than 90% RH at 60℃

first FC components

Electrical Characteristics

Operating conditions:


Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	3.0	3.3	3.6	V
Supply LCM current	ICC	—	—	2	mA

Note:To avoid power supply noise, please avoid using driving conditions close to min. or max. value

LED driving conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
LED current	ILED	—	20	—	mA	
LED voltage	VLED	2.8	3.0	3.2	V	Note 1
LED Life Time		50000	—	—	Hr	Note 2,3,4

Note 1 : There are 1 Groups LED



Circuit diagram

Note 2 : Ta = 25 ℃
Note 3 : Brightness to be decreased to 50% of the initial value
Note 4 : The single LED lamp case

first components

Optical Characteristics

Item		Symbol	Condition.	Min	Typ.	Max.	Unit	Remark
Response time		Tr	θ=0°、Φ=0°	-	30	40	.ms	Note 3
		Tf						
Contrast ratio		CR	At optimized viewing angle	-	800	-	-	Note 4
Color Chromaticity	White	Wx	θ=0°、Φ=0	0.255	0.305	0.355		Note 2,6,7
		Wy		0.275	0.325	0.375		
Viewing angle	Hor.	ΘR	CR≧10	-	80	-	Deg.	Note 1
		ΘL		-	80	-		
	Ver.	ΦT		-	80	-		
		ΦB		-	80	-		
Brightness		-	-	400	500	-	cd/m^2	Center of display
Uniformity		(U)	-	75	-	-	%	Note 5

Ta=25±2℃

Note 1: Definition of viewing angle range

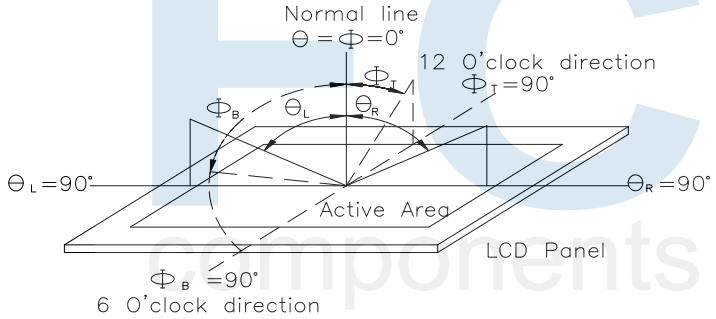


Fig.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7orBM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.

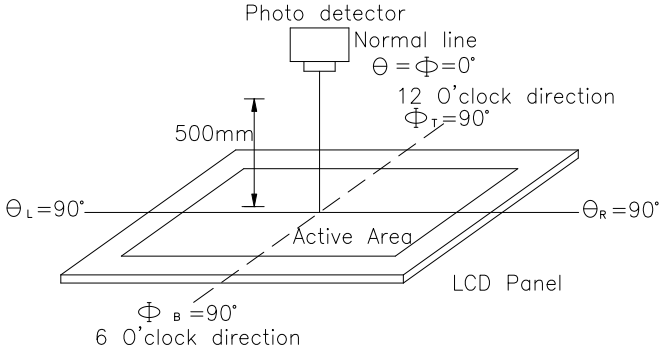


Fig. 2. Optical measurement system setup


Interface

LCM PIN Definition

Pin	Symbol	Function	Remark
1	SPI4W	SPI4W='0', 3-wire SPI. SPI4W='1', 4-wire SPI.	
2	NC	No connection	
3	SDA	Serial interface data	
4	SCL	Serial interface clock	
5	RS	Data/command selection pin (4-wire SPI use)	
6	RES	Reset pin (low active)	
7	CS	Chip selection pin (low active)	
8	GND	Ground	
9	NC	No connection	
10	VCC	Power supply.	
11	LEDK	Back light cathode	
12	LEDA	Back light anode	
13	GND	Ground	

first FC components

Contour Drawing

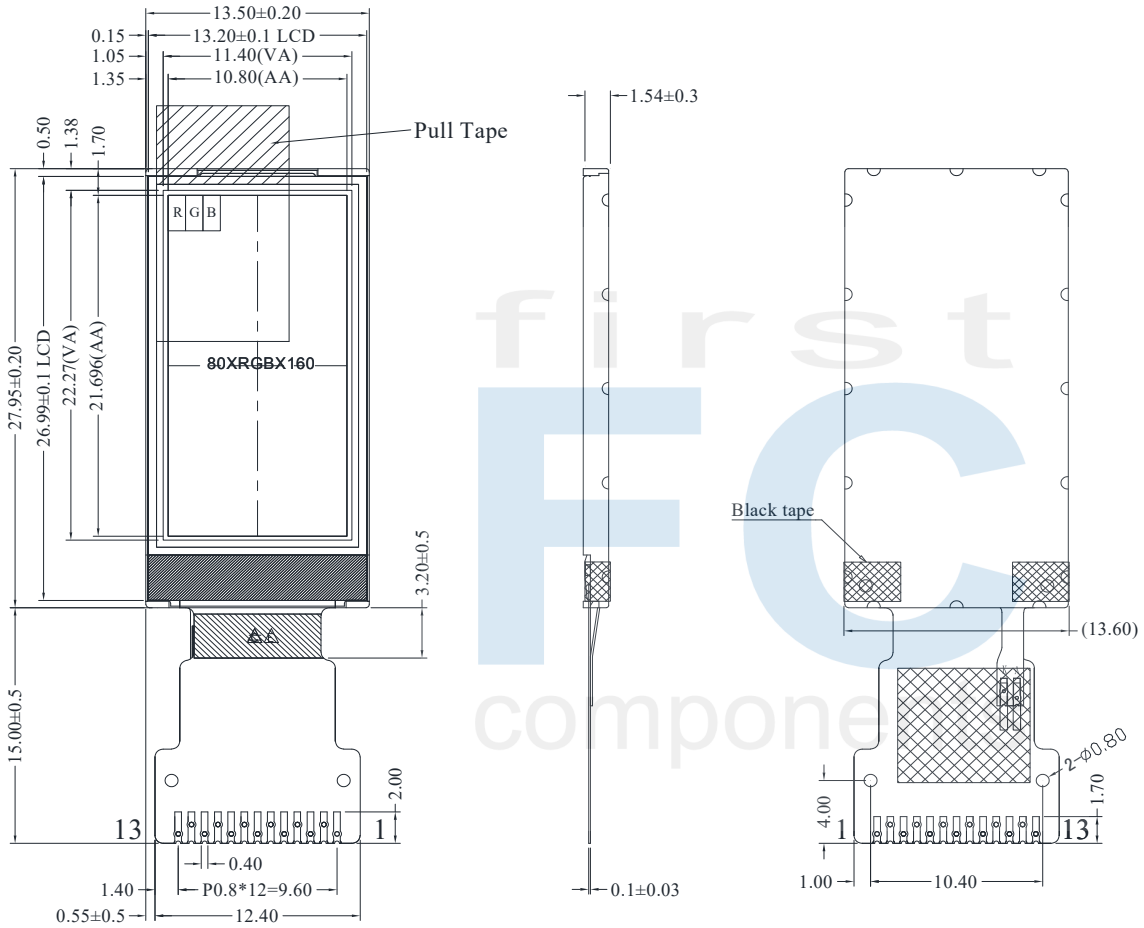

PIN NO.	SYMBOL
1	SPI4W
2	NC
3	SDA
4	SCL
5	RS
6	RES
7	CS
8	GND
9	NC
10	VCC
11	LEDK
12	LEDA
13	GND

The non-specified tolerance of dimension is ±0.3 mm .

first FC components