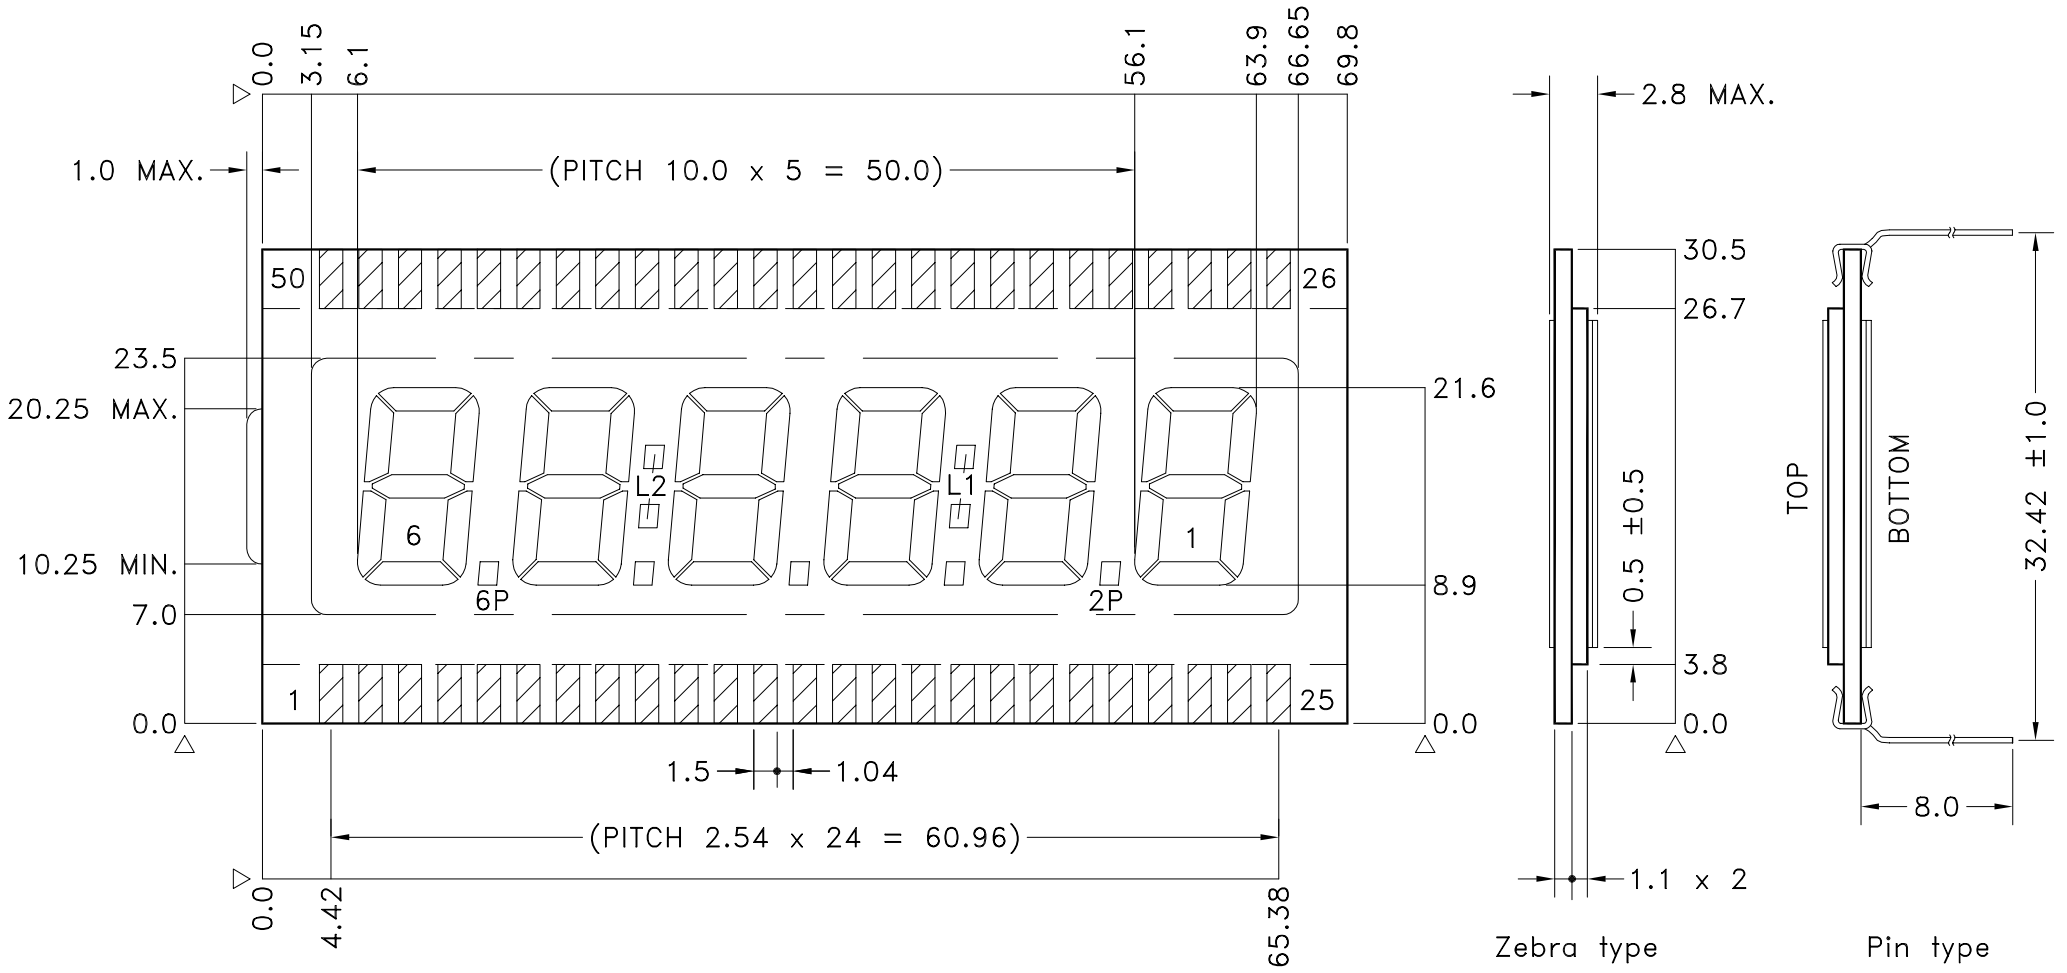


MECHANICAL TOL. ±0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD		00	01-SEP-88
APPROVED BY		SHEET 1 OF 2		
DATE		SCALE 2 : 1		

PROJECTION


APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
APPROVED BY			
DATE			
DRAWN BY : MAY MOK		UNIT IN mm	OUR REF. 01

S5042

CLOVER DISPLAY LIMITED


MODEL NO.		S5042A	S5042B	S5042C	S5042D	S5042E	S5042F	S5042G	S5042H
VIEWING DIRECTION		6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK
TEMPERATURE RANGE	OPERATE	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C
	STORAGE	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C
CONNECTOR		Zebra	Zebra	Pin	Pin	Zebra	Zebra	Pin	Pin

OPERATION VOLTAGE	3.0 V
DRIVING METHOD	STATIC
DISPLAY TYPE	TN / REFLECTIVE / POSITIVE

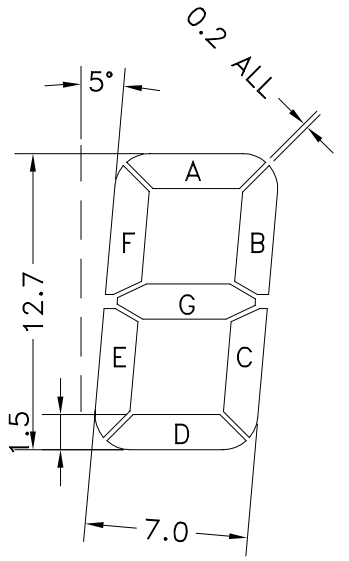

SCALE 3 : 1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13
COM	COM	6E	6D	6C	6P	5E	5D	5C	5P	4E	4D	4C	4P
PIN	14	15	16	17	18	19	20	21	22	23	24	25	26
COM	3E	3D	3C	3P	2E	2D	2C	2P	1E	1D	1C	1B	1A
PIN	27	28	29	30	31	32	33	34	35	36	37	38	39
COM	1F	1G	2B	2A	2F	2G	L1	3B	3A	3F	3G	4B	4A
PIN	40	41	42	43	44	45	46	47	48	49	50		
COM	4F	4G	L2	5B	5A	5F	5G	6B	6A	6F	6G		

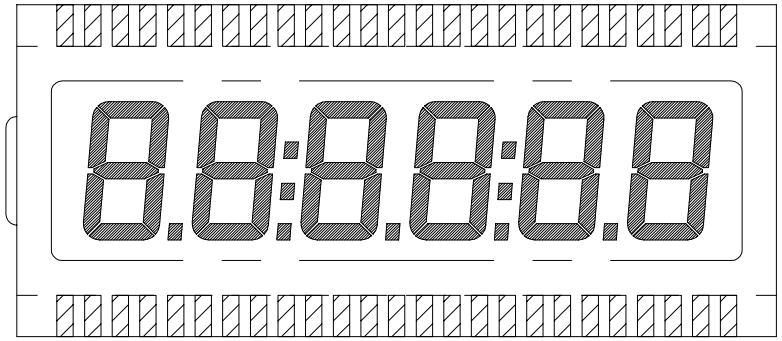

REV.	REVISION RECORD	DATE
00	1st ISSUE	01-SEP-88

STANDARD

CUSTOMER REF.

SHEET 2 OF 2

SCALE NTS

PROJECTION

S5042

APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
APPROVED BY			
DATE			
DRAWN BY : MAY MOK		UNIT IN mm	OUR REF. 01

CLOVER DISPLAY LIMITED