


The drawing contained herein is the exclusive property of WiseChip. It is not allowed to copy, reproduce and or disclose in any formats without permission of WiseChip.


Item	Date	Remark
A	20090715	Original Drawing
B	20090722	Modify FPC Profile
C	20100409	Change Protective Tape Material
D	20101229	Modify Pin Define

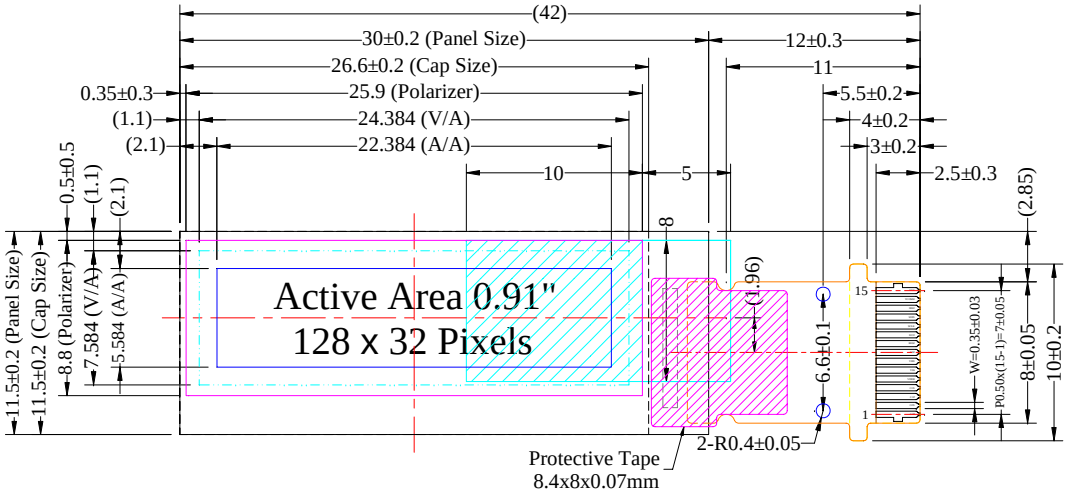


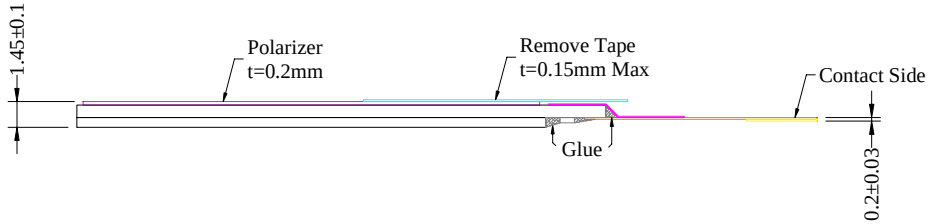

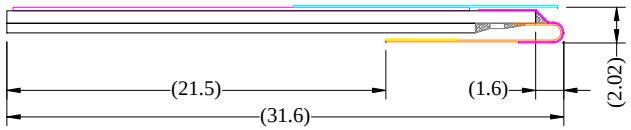

(Reference Mechnical Design)

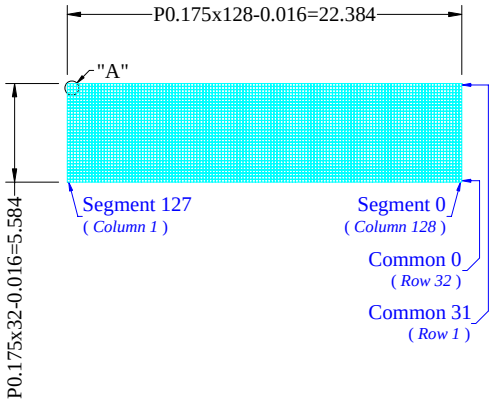



Detail "A"
Scale (10:1)

D

Pin	Symbol
1	C2P
2	C2N
3	C1P
4	C1N
5	VDDB
6	VSS
7	VDD
8	CS#
9	RES#
10	D/C#
11	SCLK
12	SDIN
13	IREF
14	VCOMH
15	VCC

Notes:

1. Color: Light Blue
2. Driver IC: SSD1306
3. FPC Number: UT-0206-P09
4. Applicable Connector: HRS FH19C-15S-0.5SH
5. Interface: 4-wire SPI
6. General Tolerance: ±0.30
7. The total thickness (1.55 Max) is without polarizer protective film & remove tape. The actual assembled total thickness with above materials should be 1.80 Max.

Customer Approval Signature	WiseChip Semiconductor Inc.						Drawing Number		Rev.
							DMX2832CNGF24		D
first FC components	Unless Otherwise Specified		Title	UG-2832HLBEG05 Folding Type OEL Display Module Pixel Number: 128 x 32, Monochrome, COG Package			Material		
	Unit	mm					Soda Lime / Polyimide		
	General Roughness								
	Tolerance			Drawn	E.E.	Panel / E.	P.M.			
	Dimension	±0.3	By	Gary Lin	Ting-Kuo Hu	Ivy Lo	Tiffany Hsu	Scale	Sheet	Size
	Angle	±1	Date	20101229	20101229	20101229	20101229	1:1	1 of 1	A3

FIRST Components s.r.l. Via Cavour, 69 21020 Buguggiate (VA) Italy Tel. +39 0332 1888005 Fax +39 0332 320856
web: www.first-components.com