



WINSTAR Display Co.,Ltd.

5F., No.31, Keya Rd., Daya Dist., Taichung City 428, Taiwan
TEL/+886-4-2568 9987 FAX/+886-4-2586 7763 E-mail/Sales@winstar.com.tw

Notification Subject: 【PN EOL】 HSD TFT LCD-2.99" IPS

■ Issue Date: 2025/10/30

NO. EOL20251030

■ Description:

The 2.99 inch bar type series 'C' is expected to face supply instability due to weak demand. The panel supplier Hannstar is planning to discontinue production. Although there is no formal EOL announcement from supplier, Winstar issues EOL notice proactively to prevent customer from further impact for potential development schedule delay. Otherwise, Winstar is developing replacement series 'Cb', please refer to comparison chart below and attachments for further details.

■ Effect of Model Number:

ITEM	Model Number (Standard)	Model Number (Customize)
LCT002R99AA0Y16E5100; LCJ002R99AA0Y16E5100;	WF0299-268800A	WJN0299A2
Please refer to attachment for further information.		

■ EOL Date: Immediately

■ Last Buy Date: Immediately

■ Last shipment Date: Immediately

■ Replacement:

We are developing replacement series 'Cb' with similar active area and outline dimensions. Please refer to specification comparison and drawings below.




WINSTAR Display Co.,Ltd.

5F., No.31, Keya Rd., Daya Dist., Taichung City 428, Taiwan

TEL/+886-4-2568 9987 FAX/+886-4-2586 7763 E-mail/Sales@winstar.com.tw

WINSTAR

Brand	Winstar	Winstar
Model Name	WF0299-268800A	WFN0286*A2
Size	2.99	2.86
Outline Dimension (WxHxD)	26.52 x 78.2 x 2.46	31.2 x 76.6 x 2.23
Active Area (HxV)	24.12 x 72	26.508 x 67.68
Dot Matrix	268 x 800	376 x 960
Pixel Pitch (HxV)	0.09 x 0.09	0.0705 x 0.0705
Viewing Angle (R/L/T/B)	80/80/80/80	80/80/80/80
Viewing Direction	IPS	IPS
Display Mode	Normally Black	Normally Black
Contrast Ratio	1200	1200
White luminance (cd/m ²)	min.350 typ.420	min. 500
LED lifetime	40000	50000
LED current	20	20
LED voltage	min.17.4 max.19.2	min.18.2 max.22.4
Power Consumption	360	420
Interface	2 Lanes MIPI	SPI+RGB(16-bit)
Driver IC	GC9503	ST7701P-G5-C
Temperature Range-Operating	-20~70	-30~85
Temperature Range-Storage (Non-Operating)	-30~80	-30~85
Pin	30	45

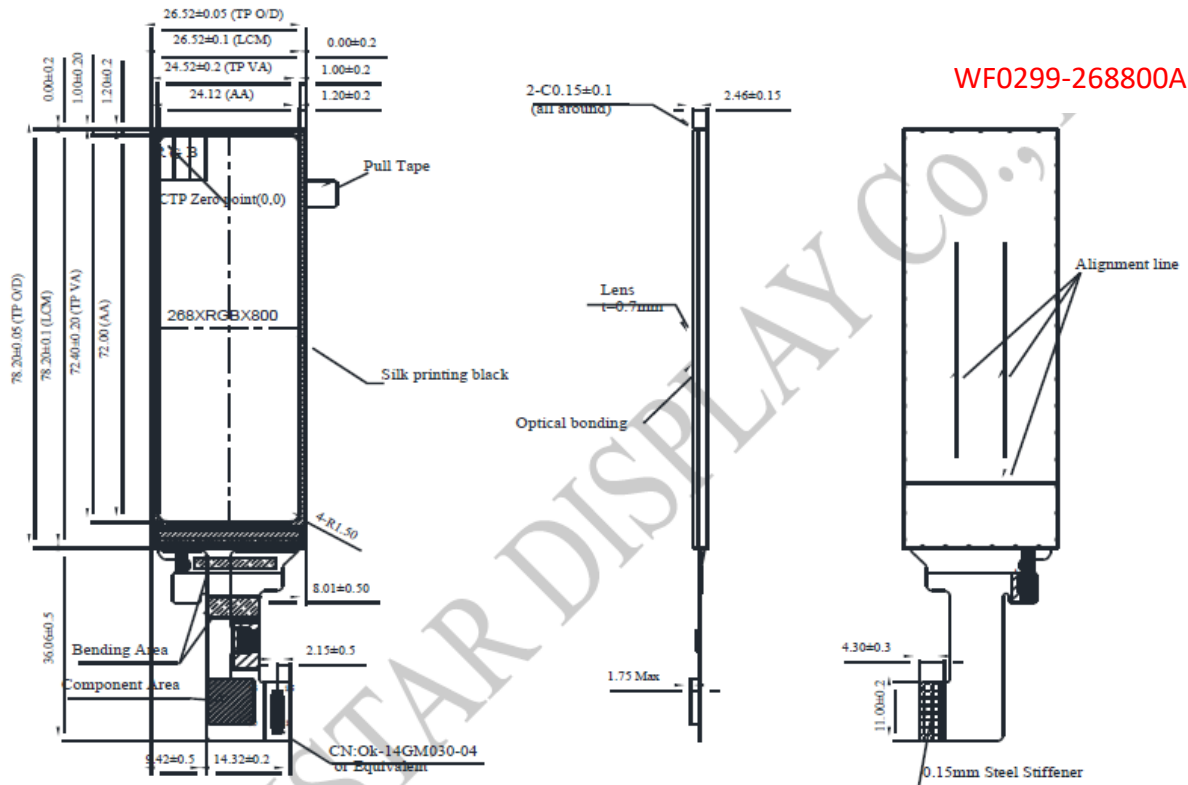




WINSTAR

WINSTAR Display Co.,Ltd.

5F., No.31, Keya Rd., Daya Dist., Taichung City 428, Taiwan

TEL/+886-4-2568 9987 FAX/+886-4-2586 7763 E-mail/Sales@winstar.com.tw

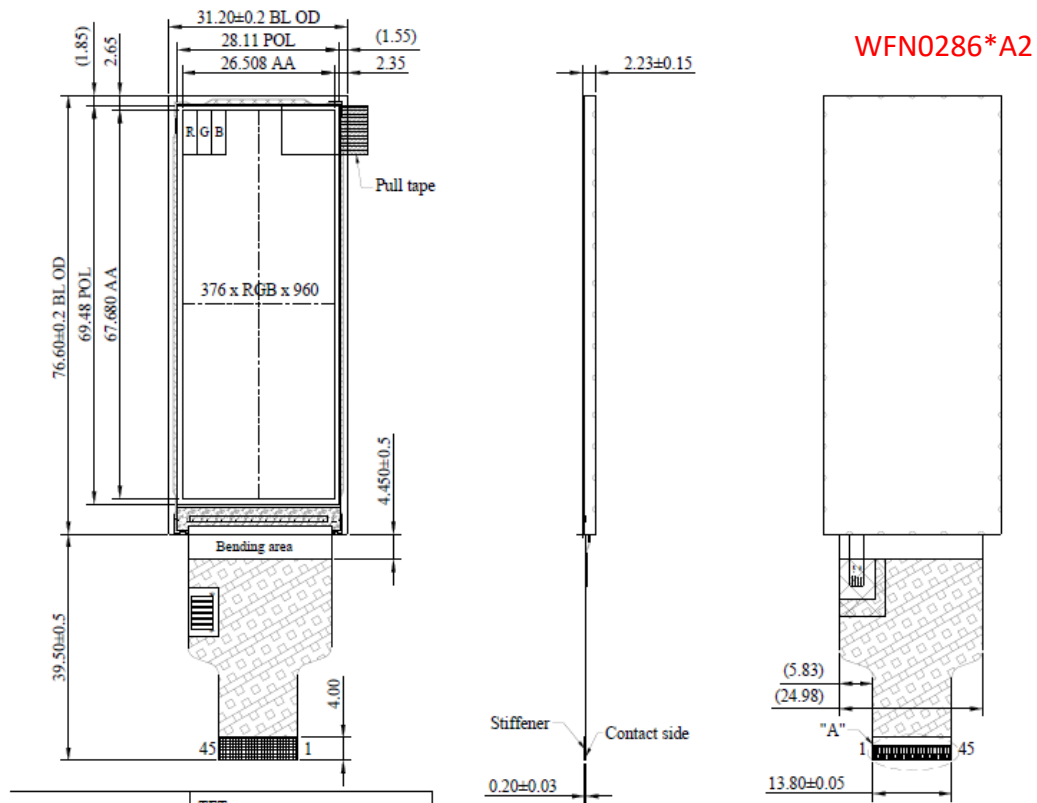

WINSTAR appreciated your support in our products and we will continue to do our best to support and work with you. If there have any further questions, please do not hesitate to reach out to your dedicated sales service representative. Thank you!

Best regards,

Candice Wang